


DABLIU

Pendelleuchte aus Aluminium. Schlanken Struktur mit drei Lichtpunkten und Diffusoren, die je nach Ausführung ausgewählt werden können. Lieferbar mit Spots für eine punktuelle Beleuchtung, mit kugelförmigen Diffusoren aus geblasenem Opalglas und mit Metallkegeln aus brüniertem Gold für eine bessere Lichtstreuung. Dimmbar.

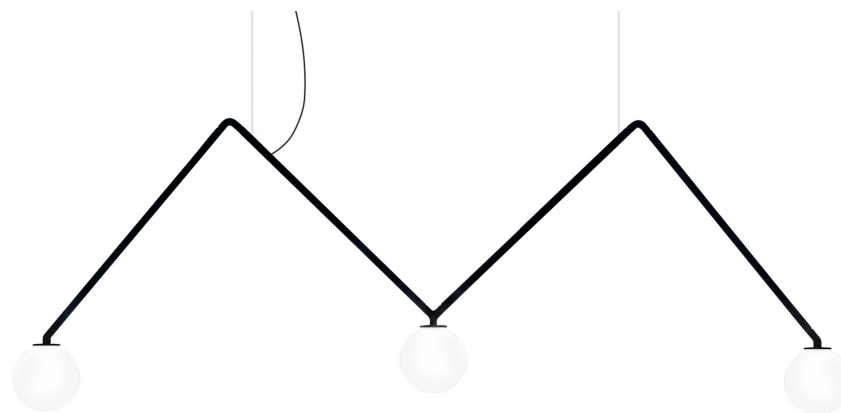

SPOT 40° | 2700K

LAMPING

Source	LED spot
Total power	3 x 5W
Emission	diffused downlight
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	3 x 400lm (source luminous flux)
Typ cri	90
Energy class	A+
Materials	aluminum + PC + ABS
Notes	cabre lenght 2m, led spot beam angle 40°
Net lamp weight	5 kg

Codes

DAB LNN 51

Structure/Diffuser


black/black

PACKAGE

Package 01

Dimension: 15x80x150 cm / Gross weight: 2,5 kg

Certificazioni

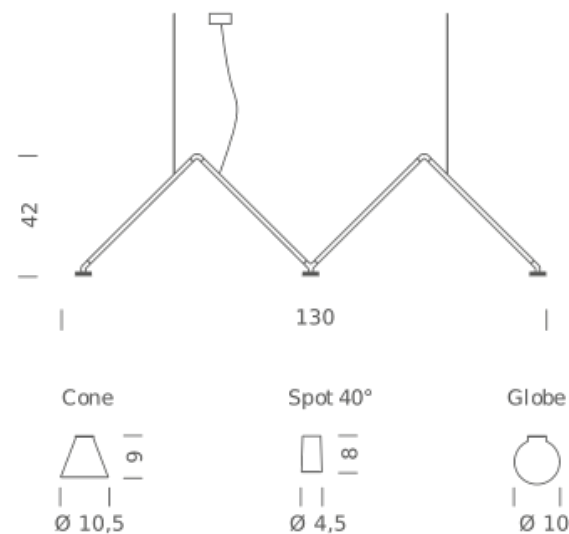

SPOT 40° | 3000K

LAMPING

Source	LED spot
Total power	3 x 5W
Emission	diffused downlight
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	3 x 400lm (source luminous flux)
Typ cri	90
Energy class	A+
Materials	aluminum + PC + ABS
Notes	cable lenght 2m, led spot beam angle 40°


Codes

DAB LNN 52

Structure/Diffuser

black/black

Certificazioni

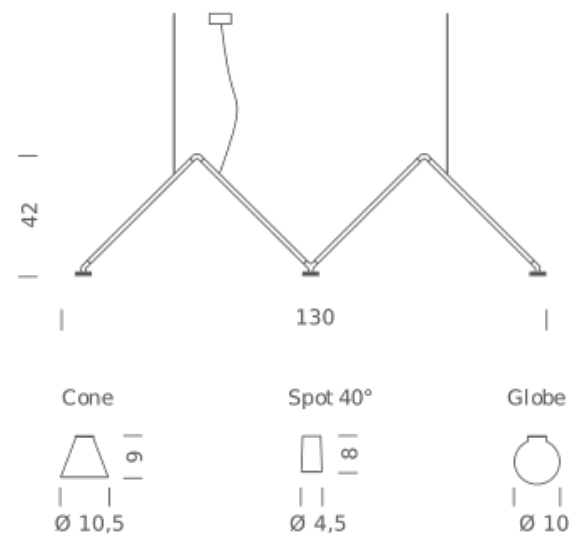

GLOBE | 2700K

LAMPING

Source	LED spot
Total power	3 x 5W
Emission	diffused downlight
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	3 x 400lm (source luminous flux)
Typ cri	90
Energy class	A+
Materials	aluminum + PC + ABS
Notes	cable lenght 2m, led spot beam angle 40°


Codes

DAB LNN 55

Structure/Diffuser

black/white

Certificazioni

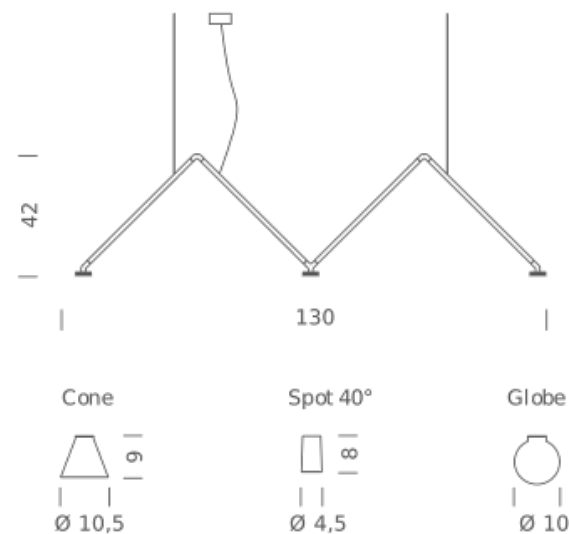

GLOBE | 3000K

LAMPING

Source	LED spot
Total power	3 x 5W
Emission	diffused downlight
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	3 x 400lm (source luminous flux)
Typ cri	90
Energy class	A+
Materials	aluminum + PC + ABS
Notes	cable lenght 2m, led spot beam angle 40°


Codes

DAB LNN 56

Structure/Diffuser

black/white

Certificazioni

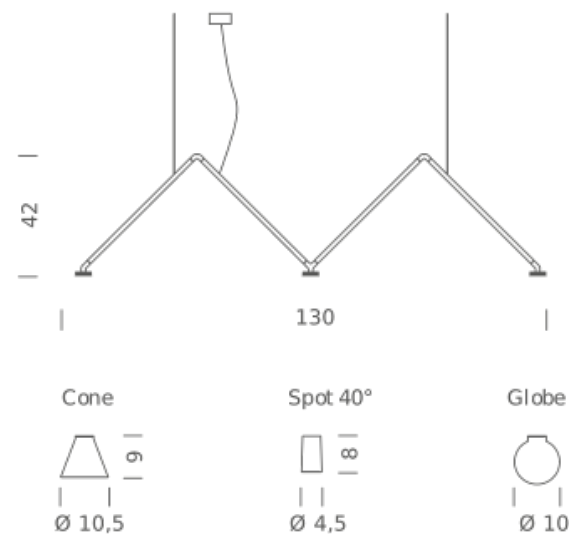

CONE | 2700K

LAMPING

Source	LED diffused
Total power	3 x 5W
Emission	indirect and diffused
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	3 x 400lm (source luminous flux)
Typ cri	90
Energy class	A+
Materials	aluminum + PC + ABS + glass
Notes	cable lenght 2m, led diffused


Codes

DAB LNN 53

Structure/Diffuser

black/gold burnished

Certificazioni

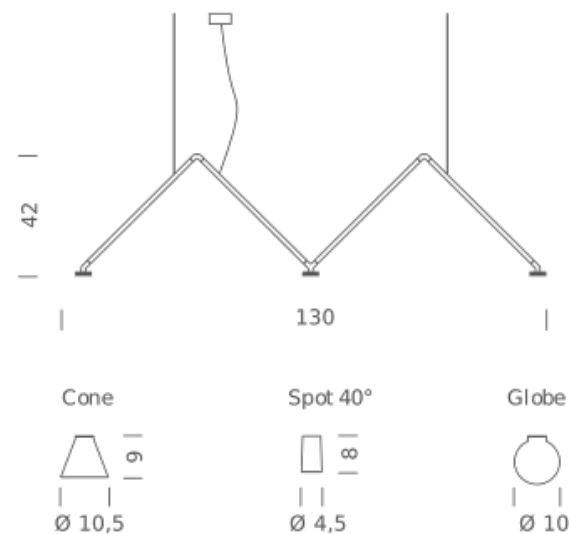

CONE | 3000K

LAMPING

Source	LED diffused
Total power	3 x 5W
Emission	indirect and diffused
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	3 x 400lm (source luminous flux)
Typ cri	90
Energy class	A+
Materials	aluminum + PC + ABS + glass
Notes	cable lenght 2m, led diffused

Codes

DAB LNN 54

Structure/Diffuser

black/gold burnished

Certificazioni

