

ELLISSE PENDANT MINOR

Federico Palazzari

Sammlung von LED-Pendel- und Steh- / Wandleuchten, erhältlich in verschiedenen Ausführungen: Major, Minor, Double, Triple und Mega, für direktes oder indirektes diffuses Licht. Hergestellt aus stranggepresstem Aluminium in mattem Weiß, mattem Schwarz, gebürstetem Aluminium, poliertem eloxiertem Gold oder lackiertem Gold. Diffusor aus opalem Methacrylat.

Ellisse wird durch eine Technologie realisiert, die von Nemo für die Kopplung der Profile entwickelt wurde.

Die Major-Version ist auch vom Boden und von der Wand aus erhältlich, mit einem Sockel aus schwarzem Marmor für die Bodenversion und einem Wandbefestigungszubehör für die Wandversion.



DOWNLIGHT 2700K

LAMPING

Source	linear LED
Total power	44W
Emission	diffused orientable
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	2250lm
Typ cri	85
Energy class	A+
Materials	Aluminium
Notes	adjustable cable length from 2,5m to 0,4m, DALI version on request

Codes

ELP LW2 52	white/white
ELP LN2 52	black/white
ELP LO2 52	gold painted/white
ELP LL2 52	polished aluminium/white
ELP LGW 52	gold polished anodized/white


Structure/Diffuser

white/white
black/white
gold painted/white
polished aluminium/white
gold polished anodized/white

PACKAGE

Package 01	Dimension: 15x80x150 cm / Gross weight: 7,5 kg
------------	--

Certificazioni

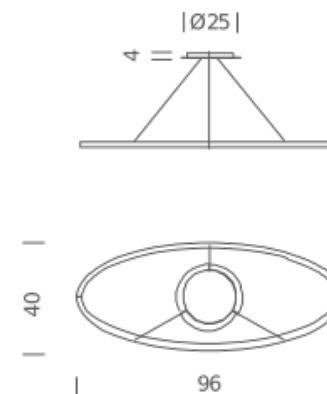

DOWNLIGHT 3000K

LAMPING

Source	linear LED
Total power	44W
Emission	diffused orientable
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	2250lm
Typ cri	85
Energy class	A+
Materials	Aluminium
Notes	adjustable cable length from 2,5m to 0,4m, DALI version on request

Codes

ELP LWW 52
ELP LNW 52
ELP LOW 52
ELP LLW 52


Structure/Diffuser

white/white
black/white
gold painted/white
polished aluminium/white

PACKAGE

Package 01 Dimension: 15x80x150 cm / Gross weight: 7,5 kg

Certificazioni

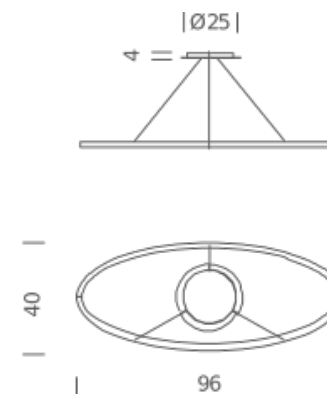

UPLIGHT 2700K

LAMPING

Source	linear LED
Total power	44W
Emission	diffused orientable
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	2250lm
Typ cri	85
Energy class	A+
Materials	Aluminium
Notes	adjustable cable length from 2,5m to 0,4m, DALI version on request

Codes

ELP LW2 51	white/white
ELP LN2 51	black/white
ELP LO2 51	gold painted/white
ELP LL2 51	polished aluminium/white
ELP LGW 51	gold polished anodized/white


Structure/Diffuser

white/white
black/white
gold painted/white
polished aluminium/white
gold polished anodized/white

PACKAGE

Package 01	Dimension: 15x80x150 cm / Gross weight: 7,5 kg
------------	--

Certificazioni

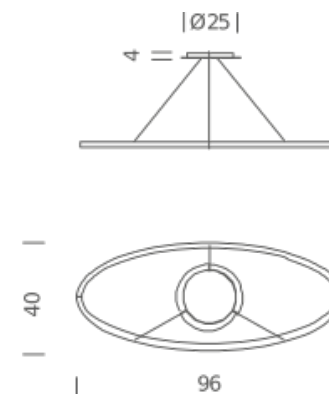

UPLIGHT 3000K

LAMPING

Source	linear LED
Total power	44W
Emission	diffused orientable
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	2250lm
Typ cri	85
Energy class	A+
Materials	Aluminium
Notes	adjustable cable length from 2,5m to 0,4m, DALI version on request

Codes

ELP LWW 51
ELP LNW 51
ELP LOW 51
ELP LLW 51

Structure/Diffuser

white/white
black/white
gold painted/white
polished aluminium/white

PACKAGE

Package 01

Dimension: 15x80x150 cm / Gross weight: 7,5 kg

Certificazioni

