

LANDLORD GROUND Ø64 I BEAM

Insulation class	Class III
Beam angle	14°
Mounting	Ground
Lamps description	Power LED: 3,4W - 260 lm ≠ FIXT 12 lm - 3000K/CRI 80 - 24V
Environment	Outdoor
Technical description	IP67 luminaries for ground recessed installation, powered 24V. Body in anodised, then resined aluminium, external ring in shot-peened stainless steel, encasing the entire control electronics. Head available in two sizes, ø49 mm, and ø64 mm, with frontal or grazing emission (one, two or four beams). Frontal emission version are available with spot or medium optic, or with integrated non removable honeycomb, for maximum visual confort. To be installed in its installation box.




Landlord Ground Ø64 I Beam

designed by Piero Lissoni

24V remote power supply to be ordered separately. Necessary box for installation, to be ordered separately.

● F004B33A005 Stainless Steel

DIMENSIONS



ELECTRICAL

Transformer type	Electronic
Transformer availability	Separate item
Transformer mounting	Remote
Emergency	Without
Voltage (V)	24

PHYSICAL

IK rating	10
Aiming	Fixed
Diameter (mm)	64
Weight (kg)	0,35
Number of heads	1




CERTIFICATIONS




Landlord Ground Ø64 I Beam .Accessories

Power Supply




RF25747

**Power supply 24V 10W.
Non Dimmable**
110-240V IP20 Class II selv.




RF25755

**Power supply 24V DC
50W. Non Dimmable**
120-240V IP67 Class II selv.




RF25749

**Power supply 24V DC
70W. Non Dimmable**
220-240V IP67 Class II selv.




RF25754

**Power supply 24V 8W.
Non Dimmable**
110-240V IP20 Class II selv.



RF25757

**Power supply 24V 10W.
Non Dimmable**
110-240V IP67 Class II selv.



RF25748

**Power supply 24V 8W.
Non Dimmable**
110-240V IP65 Class II selv.




Landlord Ground Ø64 I Beam
designed by Piero Lissoni

24V remote power supply to be ordered separately. Necessary box for installation, to be ordered separately.

F004B33A005 Stainless Steel


DIMENSIONS



CERTIFICATIONS



Mounting



F004Z0K0000

Installation box

Landlord Ground Ø64 I Beam . Lamps



Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED




Landlord Ground Ø64 I Beam
designed by Piero Lissoni

24V remote power supply to be ordered separately. Necessary box for installation, to be ordered separately.

● F004B33A005 Stainless Steel

DIMENSIONS



CERTIFICATIONS



LANDLORD GROUND Ø64 WITH HONEYCOMB

Insulation class	Class III
Beam angle	25° Medium
Mounting	Ground
Lamps description	Power LED: 3,4W - 260 lm ≠ FIXT 170 lm - 3000K/CRI 80 - 24V
Environment	Outdoor
Technical description	IP67 luminaries for ground recessed installation, powered 24V. Body in anodised, then resined aluminium, external ring in shot-peened stainless steel, encasing the entire control electronics. Head available in two sizes, ø49 mm, and ø64 mm, with frontal or grazing emission (one, two or four beams). Frontal emission version are available with spot or medium optic, or with integrated non removable honeycomb, for maximum visual confort. To be installed in its installation box.




Landlord Ground Ø64 with Honeycomb
designed by Piero Lissoni

24V remote power supply to be ordered separately. Necessary box for installation, to be ordered separately.

● F004B37A00502 Stainless Steel

DIMENSIONS



ELECTRICAL


Transformer type	Electronic
Transformer availability	Separate item
Transformer mounting	Remote
Emergency	Without
Voltage (V)	24

PHYSICAL

IK rating	10
Aiming	Fixed
Diameter (mm)	64
Weight (kg)	0,35
Number of heads	1



CERTIFICATIONS

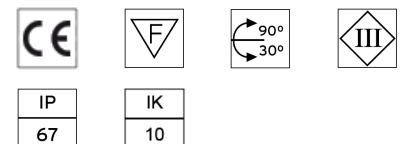

LANDLORD GROUND Ø64 WITH HONEYCOMB

Insulation class	Class III
Beam angle	15° Spot
Mounting	Ground
Lamps description	Power LED: 3,4W - 260 lm ≠ FIXT 189 lm - 3000K/CRI 80 - 24V
Environment	Outdoor
Technical description	IP67 luminaries for ground recessed installation, powered 24V. Body in anodised, then resined aluminium, external ring in shot-peened stainless steel, encasing the entire control electronics. Head available in two sizes, ø49 mm, and ø64 mm, with frontal or grazing emission (one, two or four beams). Frontal emission version are available with spot or medium optic, or with integrated non removable honeycomb, for maximum visual confort. To be installed in its installation box.




Landlord Ground Ø64 with Honeycomb
designed by Piero Lissoni

24V remote power supply to be ordered separately. Necessary box for installation, to be ordered separately.

● F004B36A00501 Stainless Steel

DIMENSIONS



ELECTRICAL


Transformer type	Electronic
Transformer availability	Separate item
Transformer mounting	Remote
Emergency	Without
Voltage (V)	24

PHYSICAL

IK rating	10
Aiming	Fixed
Diameter (mm)	64
Weight (kg)	0,35
Number of heads	1



CERTIFICATIONS

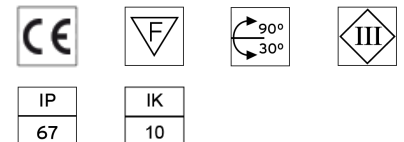

LANDLORD GROUND Ø64

Insulation class	Class III
Beam angle	25° Medium
Mounting	Ground
Lamps description	Power LED: 3,4W - 260 lm ≠ FIXT 170 lm - 3000K/CRI 80 - 24V
Environment	Outdoor
Technical description	IP67 luminaries for ground recessed installation, powered 24V. Body in anodised, then resined aluminium, external ring in shot-peened stainless steel, encasing the entire control electronics. Head available in two sizes, ø49 mm, and ø64 mm, with frontal or grazing emission (one, two or four beams). Frontal emission version are available with spot or medium optic, or with integrated non removable honeycomb, for maximum visual confort. To be installed in its installation box.




Landlord Ground Ø64

designed by Piero Lissoni

24V remote power supply to be ordered separately. Necessary box for installation, to be ordered separately.

● F004B32A005 Stainless Steel

DIMENSIONS



ELECTRICAL

Transformer type	Electronic
Transformer availability	Separate item
Transformer mounting	Remote
Emergency	Without
Voltage (V)	24

PHYSICAL

IK rating	10
Aiming	Fixed
Diameter (mm)	64
Weight (kg)	0,35
Number of heads	1



CERTIFICATIONS



LANDLORD GROUND Ø64

Insulation class	Class III
Beam angle	15° Spot
Mounting	Ground
Lamps description	Power LED: 3,4W - 260 lm ≠ FIXT 189 lm - 3000K/CRI 80 - 24V
Environment	Outdoor
Technical description	IP67 luminaries for ground recessed installation, powered 24V. Body in anodised, then resined aluminium, external ring in shot-peened stainless steel, encasing the entire control electronics. Head available in two sizes, ø49 mm, and ø64 mm, with frontal or grazing emission (one, two or four beams). Frontal emission version are available with spot or medium optic, or with integrated non removable honeycomb, for maximum visual confort. To be installed in its installation box.




Landlord Ground Ø64

designed by Piero Lissoni

24V remote power supply to be ordered separately. Necessary box for installation, to be ordered separately.

● F004B31A005 Stainless Steel

DIMENSIONS



ELECTRICAL

Transformer type	Electronic
Transformer availability	Separate item
Transformer mounting	Remote
Emergency	Without
Voltage (V)	24

PHYSICAL

IK rating	10
Aiming	Fixed
Diameter (mm)	64
Weight (kg)	0,35
Number of heads	1



CERTIFICATIONS



LANDLORD GROUND Ø64 4 BEAM

Insulation class	Class III
Beam angle	41°
Mounting	Ground
Lamps description	Power LED: 3,4W - 260 lm ≠ FIXT 46 lm - 3000K/CRI 80 - 24V
Environment	Outdoor
Technical description	IP67 luminaries for ground recessed installation, powered 24V. Body in anodised, then resined aluminium, external ring in shot-peened stainless steel, encasing the entire control electronics. Head available in two sizes, ø49 mm, and ø64 mm, with frontal or grazing emission (one, two or four beams). Frontal emission version are available with spot or medium optic, or with integrated non removable honeycomb, for maximum visual confort. To be installed in its installation box.

ELECTRICAL

Transformer type	Electronic
Transformer availability	Separate item
Transformer mounting	Remote
Emergency	Without
Voltage (V)	24

PHYSICAL

IK rating	10
Aiming	Fixed
Diameter (mm)	64
Weight (kg)	0,35
Number of heads	1




Landlord Ground Ø64 4 Beam

designed by Piero Lissoni

24V remote power supply to be ordered separately. Necessary box for installation, to be ordered separately.

● F004B35A005 Stainless Steel

DIMENSIONS



CERTIFICATIONS



LANDLORD GROUND Ø64 2 BEAM

Insulation class	Class III
Beam angle	45°
Mounting	Ground
Lamps description	Power LED: 3,4W - 260 lm ≠ FIXT 23 lm - 3000K/CRI 80 - 24V
Environment	Outdoor
Technical description	IP67 luminaries for ground recessed installation, powered 24V. Body in anodised, then resined aluminium, external ring in shot-peened stainless steel, encasing the entire control electronics. Head available in two sizes, ø49 mm, and ø64 mm, with frontal or grazing emission (one, two or four beams). Frontal emission version are available with spot or medium optic, or with integrated non removable honeycomb, for maximum visual confort. To be installed in its installation box.

ELECTRICAL

Transformer type	Electronic
Transformer availability	Separate item
Transformer mounting	Remote
Emergency	Without
Voltage (V)	24

PHYSICAL

IK rating	10
Aiming	Fixed
Diameter (mm)	64
Weight (kg)	0,35
Number of heads	1




Landlord Ground Ø64 2 Beam

designed by Piero Lissoni

24V remote power supply to be ordered separately. Necessary box for installation, to be ordered separately.

● F004B34A005 Stainless Steel

DIMENSIONS



CERTIFICATIONS

