

## LANDLORD SPOT Ø40 PWM DIMMABLE

<b>Insulation class</b>	Class III
<b>Beam angle</b>	14° Spot
<b>Mounting</b>	Ground
<b>Lamps description</b>	Power LED: 2,3W - 195 lm ≠ FIXT 135 lm - 3000K/CRI 80 - 24V
<b>Environment</b>	Outdoor
<b>Technical description</b>	IP65 projector for external use made of turned aluminium body and powered at 24V, and available in 2700K, 3000K and 4000K colour temperatures. With reference to the horizontal axis, the spot can be oriented up to 30° down and up to 90° up. Landlord Spots are available in two sizes, ø40 and ø50 head, both equipped with desmontable front ferrule, in order to install flood lens or up to two honeycombs for maximum visual confort. Landlord Spots can be installed on solid ground spikes, with the possibility of an optional picket, on wall base, or on the innovative tree belt, designed to fix the luminaries directly on tree branches.



### Landlord Spot Ø40 PWM Dimmable

designed by Piero Lissoni

Spot orientable head for installation on ground poles or on wall base. Poles and base to be ordered as separated accessories. Heads are equipped with a dismountable ferrule, to insert flood lens or up to two honeycombs, (to be ordered as separate accessories). 24V remote power supply to be ordered separately. Each head comes with a segment of 2m outgoing cable and a wiring kit.

## ELECTRICAL


<b>Transformer type</b>	Electronic dimmable
<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Emergency</b>	Without
<b>Voltage (V)</b>	24

## PHYSICAL



<b>IK rating</b>	09
<b>Aiming</b>	Adjustable
<b>Weight (kg)</b>	0,30
<b>Number of heads</b>	1

- F004D31A001 White
- F004D31A006 Grey
- F004D31A033 Anthracite
- F004D31A030 Black
- F004D31A018 Deep Brown
- F004F31A070 Natural Oxide
- F004F31A071 Black Oxide
- F004F31A072 Green Oxide
- Product with Pole

## DIMENSIONS



## CERTIFICATIONS

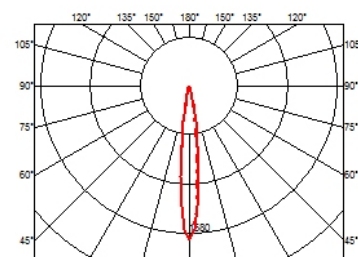

# FLOS

## Landlord Spot Ø40 PWM Dimmable .Accessories

### Optical



F004Z0C0000

**Flood lens**



F004Z0B0000


**Honeycomb**



### Landlord Spot Ø40 PWM Dimmable designed by Piero Lissoni


Spot orientable head for installation on ground poles or on wall base. Poles and base to be ordered as separated accessories. Heads are equipped with a dismantable ferrule, to insert flood lens or up to two honeycombs, (to be ordered as separate accessories). 24V remote power supply to be ordered separately. Each head comes with a segment of 2m outgoing cable and a wiring kit.

### Power Supply




RF25747

**Power supply 24V 10W.  
Non Dimmable**  
110-240V IP20 Class II selv.



RF25755

**Power supply 24V DC  
50W. Non Dimmable**  
120-240V IP67 Class II selv.




RF25749


**Power supply 24V DC  
70W. Non Dimmable**  
220-240V IP67 Class II selv.

- F004D31A001 White
- F004D31A006 Grey
- F004D31A033 Anthracite
- F004D31A030 Black
- F004D31A018 Deep Brown
- F004F31A070 Natural Oxide
- F004F31A071 Black Oxide
- F004F31A072 Green Oxide
- Product with Pole

### DIMENSIONS




### CERTIFICATIONS

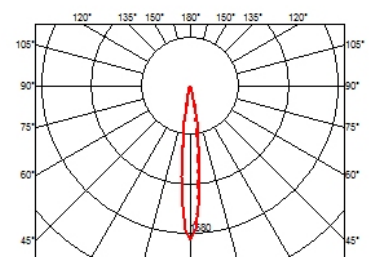

# FLOS


## Landlord Spot Ø40 PWM Dimmable .Accessories



RF25754

**Power supply 24V 8W. Non Dimmable**


I 10-240V IP20 Class II selv.



RF25757

**Power supply 24V 10W. Non Dimmable**

I 10-240V IP67 Class II selv.



RF25748



**Power supply 24V 8W. Non Dimmable**

I 10-240V IP65 Class II selv.



**Landlord Spot Ø40 PWM Dimmable**  
designed by Piero Lissoni



Spot orientable head for installation on ground poles or on wall base. Poles and base to be ordered as separated accessories. Heads are equipped with a dismountable ferrule, to insert flood lens or up to two honeycombs, (to be ordered as separate accessories). 24V remote power supply to be ordered separately. Each head comes with a segment of 2m outgoing cable and a wiring kit.



F990B02A000

**Power supply 120/270Vac / 24Vdc 35W. Dimmable**



I-10V PWM control. IP67.



F990B04A000

**Power supply 120/270Vac / 24Vdc 70W. Dimmable**



I-10V PWM control. IP67.



F990B03A000

**Power supply 120/270Vac / 24Vdc 35W. Dimmable**



DALI PWM control. IP67.



F990B05A000



**Power supply 120/270Vac / 24Vdc 70W. Dimmable**

DALI PWM control. IP67.



F990B00A000

**I-10V PWM control interface 24Vdc 120W. Dimmable**  
IP67. Power supply not included.




F990B01A000


**DALI PWM control interface 24Vdc 120W. Dimmable**  
IP67. Power supply not included.

- F004D3IA001 White
- F004D3IA006 Grey
- F004D3IA033 Anthracite
- F004D3IA030 Black
- F004D3IA018 Deep Brown
- F004F3IA070 Natural Oxide
- F004F3IA071 Black Oxide
- F004F3IA072 Green Oxide
- Product with Pole

### DIMENSIONS



### CERTIFICATIONS

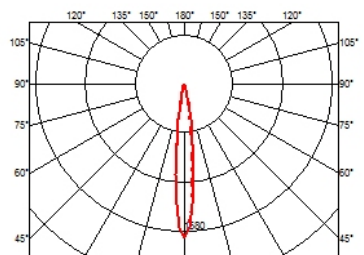

# FLOS

## Landlord Spot Ø40 PWM Dimmable .Accessories

### Mounting



○ F004Z070000

#### Tree strap


Accessory for spot installation directly on three branch, from ø30 mm up to ø100mm.



○ F004Z060000

#### Earth stick

To be mounted on poles with base.



● F004Z040001

● F004Z040006

● F004Z040033

● F004Z040030

● F004Z040018

● F004Z0A0070

● F004Z0A0071

● F004Z0A0072

#### Wall base



### Landlord Spot Ø40 PWM Dimmable designed by Piero Lissoni

Spot orientable head for installation on ground poles or on wall base. Poles and base to be ordered as separated accessories. Heads are equipped with a dismantable ferrule, to insert flood lens or up to two honeycombs, (to be ordered as separate accessories). 24V remote power supply to be ordered separately. Each head comes with a segment of 2m outgoing cable and a wiring kit.

● F004D31A001 White

● F004D31A006 Grey

● F004D31A033 Anthracite

● F004D31A030 Black

● F004D31A018 Deep Brown



● F004F31A070 Natural Oxide

● F004F31A071 Black Oxide

● F004F31A072 Green Oxide

○ Product with Pole

### DIMENSIONS

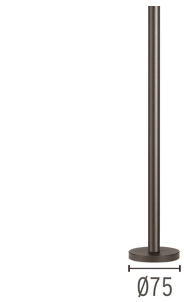

● F004Z030001

● F004Z030006

● F004Z030033

● F004Z030030

● F004Z030018

● F004Z0F0070

● F004Z0F0071

● F004Z0F0072

#### Pole with base H 900 mm

Ready for installation on rigid base. For ground installation, complete with earth stick, to be ordered as separated item.



● F004Z020001

● F004Z020006

● F004Z020033

● F004Z020030

● F004Z020018

● F004Z0E0070

● F004Z0E0071

● F004Z0E0072

#### Pole with base H 600 mm

Ready for installation on rigid base. For ground installation, complete with earth stick, to be ordered as separated item.



● F004Z010001

● F004Z010006

● F004Z010033

● F004Z010030

● F004Z010018

● F004Z0D0070


● F004Z0D0071

● F004Z0D0072

#### Pole with base H 300 mm

Ready for installation on rigid base. For ground installation, complete with earth stick, to be ordered as separated item.

### CERTIFICATIONS

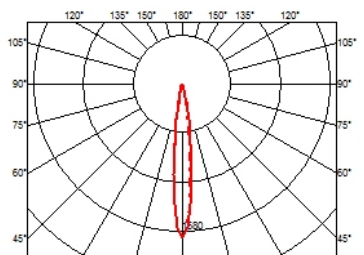

# FLOS

## Landlord Spot Ø40 PWM Dimmable . Lamps



### Power LED

### Lamp category:

LED

### Socket:

Special base

### Lamp type:

Power LED




### Landlord Spot Ø40 PWM Dimmable

designed by Piero Lissoni



Spot orientable head for installation on ground poles or on wall base. Poles and base to be ordered as separated accessories. Heads are equipped with a dismantable ferrule, to insert flood lens or up to two honeycombs, (to be ordered as separate accessories). 24V remote power supply to be ordered separately. Each head comes with a segment of 2m outgoing cable and a wiring kit.

- F004D31A001 White
- F004D31A006 Grey
- F004D31A033 Anthracite
- F004D31A030 Black
- F004D31A018 Deep Brown
- F004F31A070 Natural Oxide
- F004F31A071 Black Oxide
- F004F31A072 Green Oxide
- Product with Pole

### DIMENSIONS



### CERTIFICATIONS

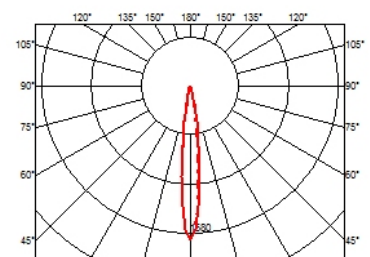

## LANDLORD SPOT Ø40 PWM DIMMABLE

<b>Insulation class</b>	Class III
<b>Beam angle</b>	33° Medium
<b>Mounting</b>	Ground
<b>Lamps description</b>	Power LED: 2,3W - 195 lm ≠ FIXT 127 lm - 3000K/CRI 80 - 24V
<b>Environment</b>	Outdoor
<b>Technical description</b>	IP65 projector for external use made of turned aluminium body and powered at 24V, and available in 2700K, 3000K and 4000K colour temperatures. With reference to the horizontal axis, the spot can be oriented up to 30° down and up to 90° up. Landlord Spots are available in two sizes, ø40 and ø50 head, both equipped with desmontable front ferrule, in order to install flood lens or up to two honeycombs for maximum visual confort. Landlord Spots can be installed on solid ground spikes, with the possibility of an optional picket, on wall base, or on the innovative tree belt, designed to fix the luminaries directly on tree branches.



### Landlord Spot Ø40 PWM Dimmable designed by Piero Lissoni

Spot orientable head for installation on ground poles or on wall base. Poles and base to be ordered as separated accessories. Heads are equipped with a dismountable ferrule, to insert flood lens or up to two honeycombs, (to be ordered as separate accessories). 24V remote power supply to be ordered separately. Each head comes with a segment of 2m outgoing cable and a wiring kit.

### ELECTRICAL


<b>Transformer type</b>	Electronic dimmable
<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Emergency</b>	Without
<b>Voltage (V)</b>	24

### PHYSICAL



<b>IK rating</b>	09
<b>Aiming</b>	Adjustable
<b>Weight (kg)</b>	0,30
<b>Number of heads</b>	1

- F004D32A001 White
- F004D32A006 Grey
- F004D32A033 Anthracite
- F004D32A030 Black
- F004D32A018 Deep Brown
- F004F32A070 Natural Oxide
- F004F32A071 Black Oxide
- F004F32A072 Green Oxide
- Product with Pole

### DIMENSIONS



### CERTIFICATIONS

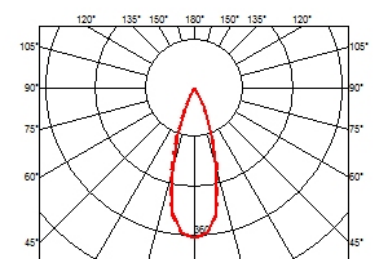

# FLOS

## Landlord Spot Ø40 PWM Dimmable .Accessories

### Optical



F004Z0C0000

**Flood lens**



F004Z0B0000


**Honeycomb**



### Landlord Spot Ø40 PWM Dimmable designed by Piero Lissoni


Spot orientable head for installation on ground poles or on wall base. Poles and base to be ordered as separated accessories. Heads are equipped with a dismantable ferrule, to insert flood lens or up to two honeycombs, (to be ordered as separate accessories). 24V remote power supply to be ordered separately. Each head comes with a segment of 2m outgoing cable and a wiring kit.

### Power Supply




RF25747

**Power supply 24V 10W.  
Non Dimmable**  
110-240V IP20 Class II selv.



RF25755

**Power supply 24V DC  
50W. Non Dimmable**  
120-240V IP67 Class II selv.




RF25749



**Power supply 24V DC  
70W. Non Dimmable**  
220-240V IP67 Class II selv.

- F004D32A001 White
- F004D32A006 Grey
- F004D32A033 Anthracite
- F004D32A030 Black
- F004D32A018 Deep Brown
- F004F32A070 Natural Oxide
- F004F32A071 Black Oxide
- F004F32A072 Green Oxide
- Product with Pole

### DIMENSIONS




### CERTIFICATIONS

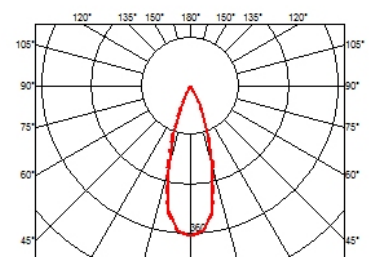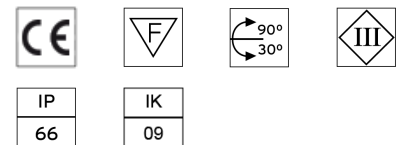

# FLOS


## Landlord Spot Ø40 PWM Dimmable .Accessories



RF25754

**Power supply 24V 8W. Non Dimmable**


I 10-240V IP20 Class II selv.



RF25757

**Power supply 24V 10W. Non Dimmable**

I 10-240V IP67 Class II selv.



RF25748



**Power supply 24V 8W. Non Dimmable**

I 10-240V IP65 Class II selv.



**Landlord Spot Ø40 PWM Dimmable**  
designed by Piero Lissoni



Spot orientable head for installation on ground poles or on wall base. Poles and base to be ordered as separated accessories. Heads are equipped with a dismountable ferrule, to insert flood lens or up to two honeycombs, (to be ordered as separate accessories). 24V remote power supply to be ordered separately. Each head comes with a segment of 2m outgoing cable and a wiring kit.



F990B02A000

**Power supply 120/270Vac / 24Vdc 35W. Dimmable**



I-10V PWM control. IP67.



F990B04A000

**Power supply 120/270Vac / 24Vdc 70W. Dimmable**



I-10V PWM control. IP67.



F990B03A000

**Power supply 120/270Vac / 24Vdc 35W. Dimmable**



DALI PWM control. IP67.



F990B05A000



**Power supply 120/270Vac / 24Vdc 70W. Dimmable**

DALI PWM control. IP67.



F990B00A000

**I-10V PWM control interface 24Vdc 120W. Dimmable**  
IP67. Power supply not included.




F990B01A000


**DALI PWM control interface 24Vdc 120W. Dimmable**  
IP67. Power supply not included.

- F004D32A001 White
- F004D32A006 Grey
- F004D32A033 Anthracite
- F004D32A030 Black
- F004D32A018 Deep Brown
- F004F32A070 Natural Oxide
- F004F32A071 Black Oxide
- F004F32A072 Green Oxide
- Product with Pole

### DIMENSIONS



### CERTIFICATIONS

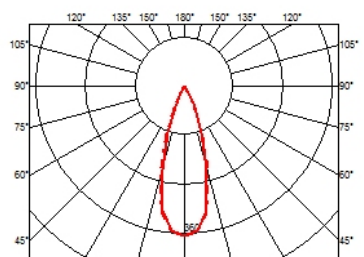



# FLOS

## Landlord Spot Ø40 PWM Dimmable .Accessories

### Mounting



○ F004Z070000

#### Tree strap


Accessory for spot installation directly on three branch, from ø30 mm up to ø100mm.



○ F004Z060000

#### Earth stick

To be mounted on poles with base.



● F004Z040001

● F004Z040006

● F004Z040033

● F004Z040030

● F004Z040018

● F004Z0A0070

● F004Z0A0071

● F004Z0A0072

#### Wall base

### Landlord Spot Ø40 PWM Dimmable designed by Piero Lissoni

Spot orientable head for installation on ground poles or on wall base. Poles and base to be ordered as separated accessories. Heads are equipped with a dismantable ferrule, to insert flood lens or up to two honeycombs, (to be ordered as separate accessories). 24V remote power supply to be ordered separately. Each head comes with a segment of 2m outgoing cable and a wiring kit.

● F004D32A001 White

● F004D32A006 Grey

● F004D32A033 Anthracite

● F004D32A030 Black

● F004D32A018 Deep Brown



● F004F32A070 Natural Oxide

● F004F32A071 Black Oxide

● F004F32A072 Green Oxide

○ Product with Pole

### DIMENSIONS



● F004Z030001

● F004Z030006

● F004Z030033

● F004Z030030

● F004Z030018

● F004Z0F0070

● F004Z0F0071

● F004Z0F0072

#### Pole with base H 900 mm

Ready for installation on rigid base. For ground installation, complete with earth stick, to be ordered as separated item.



● F004Z020001

● F004Z020006

● F004Z020033

● F004Z020030

● F004Z020018

● F004Z0E0070

● F004Z0E0071

● F004Z0E0072

#### Pole with base H 600 mm

Ready for installation on rigid base. For ground installation, complete with earth stick, to be ordered as separated item.



● F004Z010001

● F004Z010006

● F004Z010033

● F004Z010030

● F004Z010018

● F004Z0D0070


● F004Z0D0071

● F004Z0D0072

#### Pole with base H 300 mm

Ready for installation on rigid base. For ground installation, complete with earth stick, to be ordered as separated item.

### CERTIFICATIONS

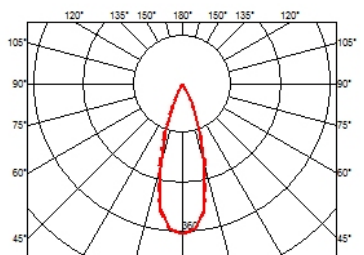

# FLOS

## Landlord Spot Ø40 PWM Dimmable . Lamps



### Power LED

### Lamp category:

LED

### Socket:

Special base

### Lamp type:

Power LED


### Landlord Spot Ø40 PWM Dimmable

designed by Piero Lissoni

Spot orientable head for installation on ground poles or on wall base. Poles and base to be ordered as separated accessories. Heads are equipped with a dismountable ferrule, to insert flood lens or up to two honeycombs, (to be ordered as separate accessories). 24V remote power supply to be ordered separately. Each head comes with a segment of 2m outgoing cable and a wiring kit.

- F004D32A001 White
- F004D32A006 Grey
- F004D32A033 Anthracite
- F004D32A030 Black
- F004D32A018 Deep Brown
- F004F32A070 Natural Oxide
- F004F32A071 Black Oxide
- F004F32A072 Green Oxide
- Product with Pole

### DIMENSIONS



### CERTIFICATIONS

