

## CAMOUFLAGE 140 MM

<b>Insulation class</b>	Class III
<b>Beam angle</b>	157°
<b>Mounting</b>	Wall surface
<b>Lamps description</b>	Mid-Power Led: 8W - 786 lm ≠ FIXT 474 lm - 2700K/CRI 80 - 24V
<b>Environment</b>	Indoor, Outdoor
<b>Notes</b>	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.










**Technical description**

Dissipating aluminum body with diffuser in transparent polycarbonate. The Crema d'Orcia and Basaltina stone finishes are made by fastening high-strength, high-resistance adhesive to a stone plate created by means of mechanical machining from a solid block. The concrete finishing is made by fastening a poured cement plate reinforced with fiberglass using a single component high strength, high-resistance adhesive. The Primer version is painted after installation with normal water-based colors (tempera, stucco, water-based paints) to ensure maximum uniformity with the architecture. The aluminum versions are finished with a high-resistance coating: after a sandblasting treatment of all components to make the surface porous and ensure a greater adhesion of the paint, the external coating is applied with a double layer with epoxy powders according to the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. Upon commercial and technical evaluation, it is possible to create customized versions with other materials on request.



### Camouflage 140 mm designed by Piero Lissoni

Collection of products for outdoor use, for wall installation with LED light source. 24V power source not included. Includes power cable of 100 mm. The driver can be installed remotely (remote housing not required) or housed at the back of the luminaire by means of a suitable optional remote housing.

	FI310000	Primer
	FI310001	White
	FI310006	Grey
	FI310018	Deep Brown
	FI310030	Black
	FI310033	Anthracite
	FI310087	Basaltina Stone
	FI310089	Concrete
	FI310090	Crema d'Orcia Stone


### ELECTRICAL

<b>Transformer type</b>	Electronic
<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Integral, Remote
<b>Emergency</b>	Without
<b>Voltage (V)</b>	24

### PHYSICAL


<b>Aiming</b>	Fixed
<b>Diameter (mm)</b>	140
<b>Weight (kg)</b>	max 0,45
<b>Number of heads</b>	1

### DIMENSIONS



\*Concrete, crema d'orcias, basaltina H = 35 mm.



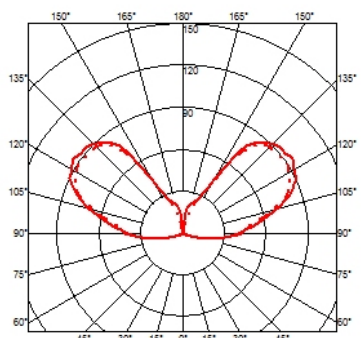






### CERTIFICATIONS






## Camouflage 140 mm designed by Piero Lissoni

Collection of products for outdoor use, for wall installation with LED light source. 24V power source not included. Includes power cable of 100 mm. The driver can be installed remotely (remote housing not required) or housed at the back of the luminaire by means of a suitable optional remote housing.


-  FI310000 Primer
-  FI310001 White
-  FI310006 Grey
-  FI310018 Deep Brown
-  FI310030 Black
-  FI310033 Anthracite
-  FI310087 Basaltina Stone
-  FI310089 Concrete
-  FI310090 Crema d'Orcia Stone

## DIMENSIONS




\*Concrete, crema d'orcina, basaltina H = 35 mm.

## CERTIFICATIONS

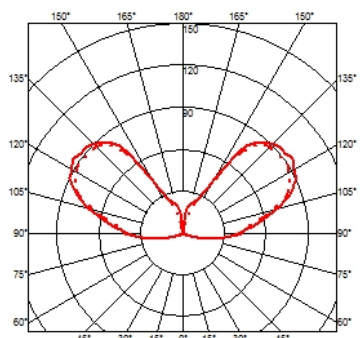

## Camouflage 140 mm .Accessories

### Power Supply



 RF25747

**Power supply 24V 10W.  
Non Dimmable**


110-240V IP20 Class II selv.



 RF25750

**Power supply 17W**

Power supply for remote installation 24V DC 17W / 110-240V (15W 110V) IP20 Class II selv.




 RF25755

**Power supply 24V DC 50W. Non Dimmable**

120-240V IP67 Class II selv.

## Camouflage 140 mm .Accessories




RF25749

**Power supply 24V DC 70W. Non Dimmable**  
220-240V IP67 Class II selv.



RF25756

**Power supply 100W**  
Power supply for remote installation 24V DC 100W / 120-240V IP67 Class II selv.



RF25748

**Power supply 24V 8W. Non Dimmable**  
110-240V IP65 Class II selv.



**Camouflage 140 mm**  
designed by Piero Lissoni

Collection of products for outdoor use, for wall installation with LED light source. 24V power source not included. Includes power cable of 100 mm. The driver can be installed remotely (remote housing not required) or housed at the back of the luminaire by means of a suitable optional remote housing.




RF25752

**Power supply 20W**  
Power supply for remote installation 24V DC 20W / 220-240V IP67 Class II selv.


- FI310000 Primer
- FI310001 White
- FI310006 Grey
- FI310018 Deep Brown
- FI310030 Black
- FI310033 Anthracite
- FI310087 Basaltina Stone
- FI310089 Concrete
- FI310090 Crema d'Orcia Stone

### DIMENSIONS




\*Concrete, crema d'orcina, basaltina H = 35 mm.

### CERTIFICATIONS

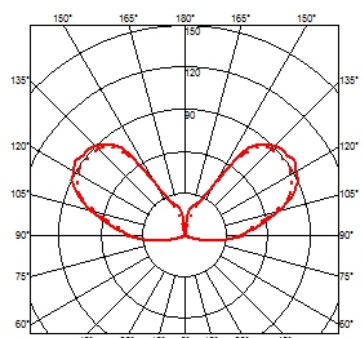

### Mounting



F1318000

**Installation box**

# FLOS

## Camouflage 140 mm . Lamps



### Mid-Power LED

**Lamp category:**  
LED

**Socket:**  
Special base










**Lamp type:**  
Power LED




### Camouflage 140 mm

designed by Piero Lissoni

Collection of products for outdoor use, for wall installation with LED light source. 24V power source not included. Includes power cable of 100 mm. The driver can be installed remotely (remote housing not required) or housed at the back of the luminaire by means of a suitable optional remote housing.

	F1310000	Primer
	F1310001	White
	F1310006	Grey
	F1310018	Deep Brown
	F1310030	Black
	F1310033	Anthracite
	F1310087	Basaltina Stone
	F1310089	Concrete
	F1310090	Crema d'Orcia Stone

### DIMENSIONS



\*Concrete, crema d'orcica, basaltina H = 35 mm.

### CERTIFICATIONS

