

OUTGRAZE 35 L 600 MM

| | |
|--------------------------|--|
| Insulation class | Class III |
| Beam angle | 19° |
| Mounting | Ceiling surface, Wall surface |
| Lamps description | Power Led: 15W - 1300 lm ≠ *FIXT 965 lm - 3000K/CRI 80 - 48V (*FIXT lm = Medium Optic) |
| Environment | Indoor, Outdoor |
| Notes | We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire. |

Technical description

Central body in extruded aluminum, end cap in die-cast aluminum. Optics made with constant pitch between the lenses to offer a homogeneous luminous flux even in case of multiple lamps installed in a continuous line. High resistance external coating applied with a double layer of epoxy powders in accordance with the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. Diffuser in extra clear transparent glass, screen-printed and glued to ensure a watertight seal. The installation of the product requires use of steel brackets, to be ordered separately. Luminaire provided with a length of approximately 1500 mm of outgoing neoprene cable on one side. On request it is possible to provide luminaires with loop-through connection for multiple installation with continuity of line.



Outgraze 35 L 600 mm

designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

| | |
|------------|------------|
| ● F4244001 | White |
| ● F4244006 | Grey |
| ● F4244033 | Anthracite |
| ● F4244030 | Black |
| ● F4244018 | Deep Brown |


ELECTRICAL

| | |
|---------------------------------|---------------|
| Transformer type | Electronic |
| Transformer availability | Separate item |
| Transformer mounting | Remote |
| Emergency | Without |
| Voltage (V) | 48 |



PHYSICAL

| | |
|------------------------|-------|
| IK rating | 05 |
| Aiming | Fixed |
| Weight (kg) | 1,65 |
| Number of heads | 1 |

DIMENSIONS

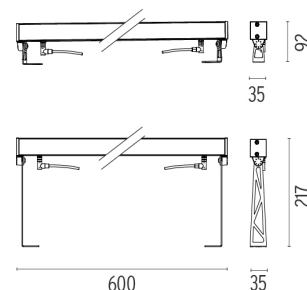

CERTIFICATIONS

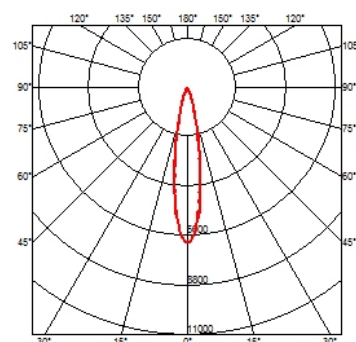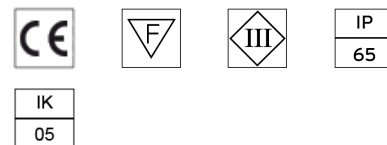




Outgraze 35 L 600 mm

designed by FLOS Outdoor



Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

- F4244001 White
- F4244006 Grey
- F4244033 Anthracite
- F4244030 Black
- F4244018 Deep Brown

DIMENSIONS

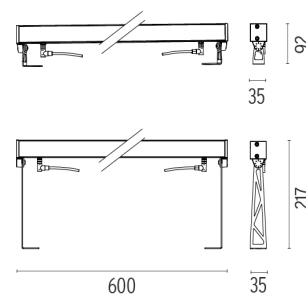

CERTIFICATIONS

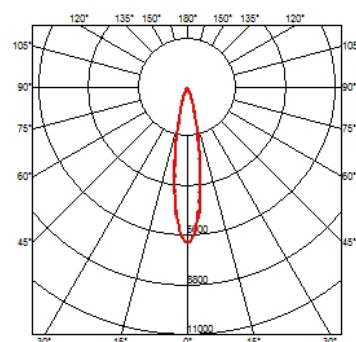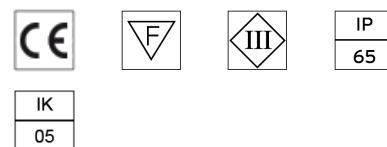

Outgraze 35 L 600 mm .Accessories

Structural



- F1204001
- F1204006
- F1204033
- F1204030
- F1204018



One pair of long rods L 200 mm.

- F1203001
- F1203006
- F1203033
- F1203030
- F1203018

One pair of short rods L 80 mm.

Outgraze 35 L 600 mm .Accessories

Power Supply



○ RF25746

Power supply 240W

Power supply 48V 240W /
110-240V single output DIN
RAIL.

○ RF25753

Power supply 60W

Power supply 48V 60W /
110-240V IP67 Class I selv
eq.



Outgraze 35 L 600 mm

designed by FLOS Outdoor

Luminaire for outdoor use for
installation on the wall or ceiling with
LED light source. 48V power source
not included. Driver for remote
installation and installation brackets to
be ordered separately. Dimmable
PWM luminaires.

- F4244001 White
- F4244006 Grey
- F4244033 Anthracite
- F4244030 Black
- F4244018 Deep Brown

Electrical



○ F1206000

3/4 way terminal block 3 poles IP68


7-12 mm cables

○ F990C00A000



2 way terminal block 3 poles IP68

7-12 mm cables

DIMENSIONS

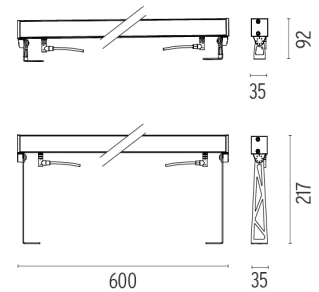

CERTIFICATIONS

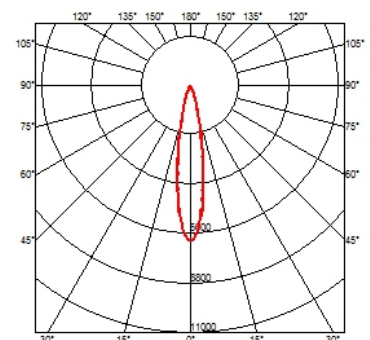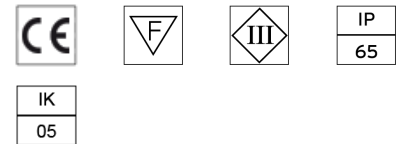

Outgraze 35 L 600 mm . Lamps



Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED


Outgraze 35 L 600 mm

designed by FLOS Outdoor



Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

- F4244001 White
- F4244006 Grey
- F4244033 Anthracite
- F4244030 Black
- F4244018 Deep Brown

DIMENSIONS

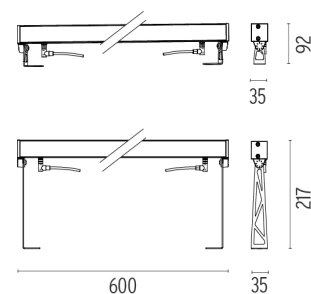

CERTIFICATIONS

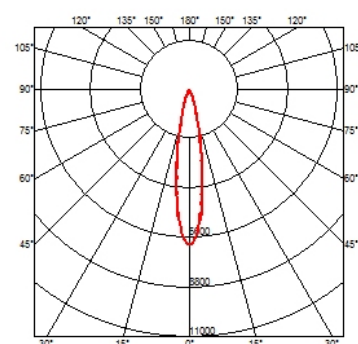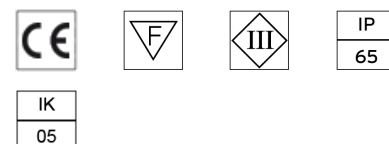

OUTGRAZE 35 L 600 MM

| | |
|--------------------------|--|
| Insulation class | Class III |
| Beam angle | 17° |
| Mounting | Ceiling surface, Wall surface |
| Lamps description | Power Led: 15W - 1300 lm ≠ *FIXT 965 lm - 3000K/CRI 80 - 48V (*FIXT lm = Medium Optic) |
| Environment | Indoor, Outdoor |
| Notes | We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire. |

Technical description

Central body in extruded aluminum, end cap in die-cast aluminum. Optics made with constant pitch between the lenses to offer a homogeneous luminous flux even in case of multiple lamps installed in a continuous line. High resistance external coating applied with a double layer of epoxy powders in accordance with the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. Diffuser in extra clear transparent glass, screen-printed and glued to ensure a watertight seal. The installation of the product requires use of steel brackets, to be ordered separately. Luminaire provided with a length of approximately 1500 mm of outgoing neoprene cable on one side. On request it is possible to provide luminaires with loop-through connection for multiple installation with continuity of line.



Outgraze 35 L 600 mm designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

| | |
|------------|------------|
| ● F4262001 | White |
| ● F4262006 | Grey |
| ● F4262033 | Anthracite |
| ● F4262030 | Black |
| ● F4262018 | Deep Brown |


ELECTRICAL

| | |
|---------------------------------|---------------|
| Transformer type | Electronic |
| Transformer availability | Separate item |
| Transformer mounting | Remote |
| Emergency | Without |
| Voltage (V) | 48 |



PHYSICAL

| | |
|------------------------|-------|
| IK rating | 05 |
| Aiming | Fixed |
| Weight (kg) | 1,65 |
| Number of heads | 1 |

DIMENSIONS



CERTIFICATIONS

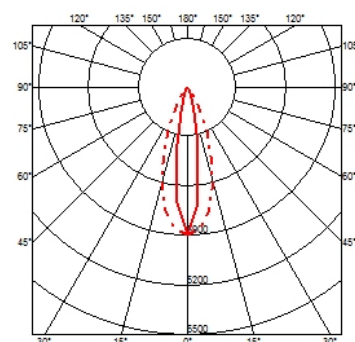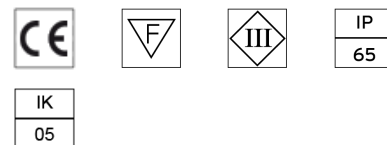




Outgraze 35 L 600 mm

designed by FLOS Outdoor



Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

- F4262001 White
- F4262006 Grey
- F4262033 Anthracite
- F4262030 Black
- F4262018 Deep Brown

DIMENSIONS

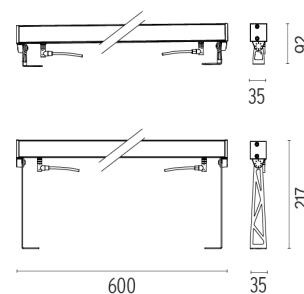

CERTIFICATIONS

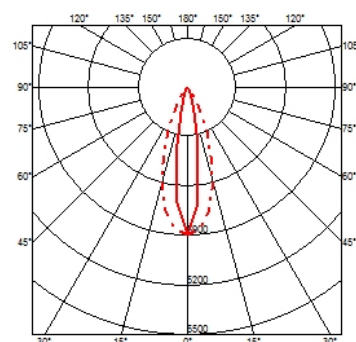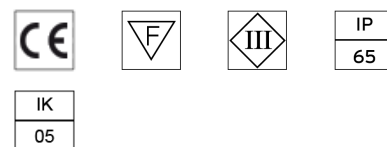

Outgraze 35 L 600 mm .Accessories

Structural



- F1204001
- F1204006
- F1204033
- F1204030
- F1204018


One pair of long rods L 200 mm.

- F1203001
- F1203006
- F1203033
- F1203030
- F1203018

One pair of short rods L 80 mm.

Outgraze 35 L 600 mm .Accessories


Power Supply



RF25746

Power supply 240W

Power supply 48V 240W / 110-240V single output DIN RAIL.



RF25753

Power supply 60W

Power supply 48V 60W / 110-240V IP67 Class I selv eq.



Outgraze 35 L 600 mm

designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

- F4262001 White
- F4262006 Grey
- F4262033 Anthracite
- F4262030 Black
- F4262018 Deep Brown

Electrical



F1206000

3/4 way terminal block 3 poles IP68

7-12 mm cables




F990C00A000



2 way terminal block 3 poles IP68

7-12 mm cables

DIMENSIONS



CERTIFICATIONS

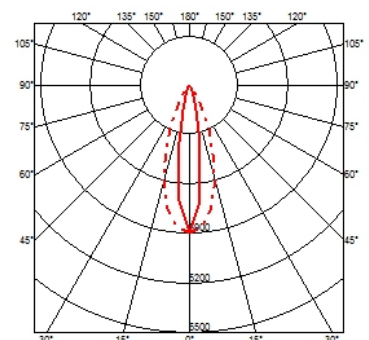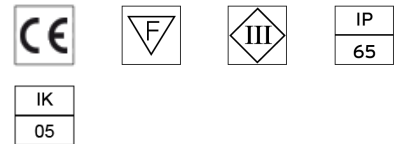

Outgraze 35 L 600 mm . Lamps



Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED


Outgraze 35 L 600 mm

designed by FLOS Outdoor



Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

- F4262001 White
- F4262006 Grey
- F4262033 Anthracite
- F4262030 Black
- F4262018 Deep Brown

DIMENSIONS



CERTIFICATIONS

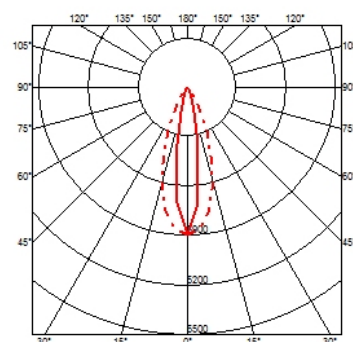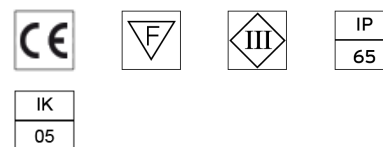

OUTGRAZE 35 L 600 MM

| | |
|--------------------------|--|
| Insulation class | Class III |
| Beam angle | 62° |
| Mounting | Ceiling surface, Wall surface |
| Lamps description | Power Led: 15W - 1300 lm ≠ *FIXT 965 lm - 3000K/CRI 80 - 48V (*FIXT lm = Medium Optic) |
| Environment | Indoor, Outdoor |
| Notes | We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire. |

Technical description

Central body in extruded aluminum, end cap in die-cast aluminum. Optics made with constant pitch between the lenses to offer a homogeneous luminous flux even in case of multiple lamps installed in a continuous line. High resistance external coating applied with a double layer of epoxy powders in accordance with the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. Diffuser in extra clear transparent glass, screen-printed and glued to ensure a watertight seal. The installation of the product requires use of steel brackets, to be ordered separately. Luminaire provided with a length of approximately 1500 mm of outgoing neoprene cable on one side. On request it is possible to provide luminaires with loop-through connection for multiple installation with continuity of line.



Outgraze 35 L 600 mm

designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

| | |
|------------|------------|
| ● F4256001 | White |
| ● F4256006 | Grey |
| ● F4256033 | Anthracite |
| ● F4256030 | Black |
| ● F4256018 | Deep Brown |


ELECTRICAL

| | |
|---------------------------------|---------------|
| Transformer type | Electronic |
| Transformer availability | Separate item |
| Transformer mounting | Remote |
| Emergency | Without |
| Voltage (V) | 48 |



PHYSICAL

| | |
|------------------------|-------|
| IK rating | 05 |
| Aiming | Fixed |
| Weight (kg) | 1,65 |
| Number of heads | 1 |

DIMENSIONS

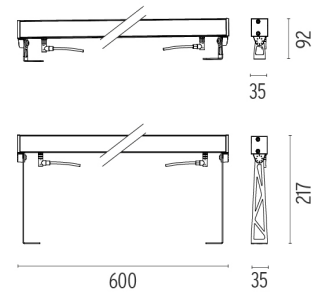

CERTIFICATIONS

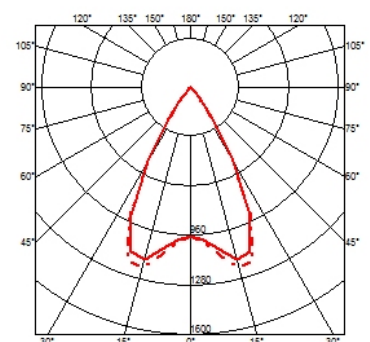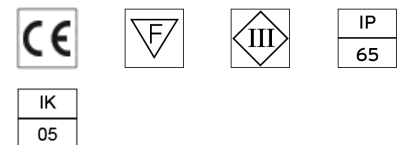




Outgraze 35 L 600 mm

designed by FLOS Outdoor



Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

- F4256001 White
- F4256006 Grey
- F4256033 Anthracite
- F4256030 Black
- F4256018 Deep Brown

DIMENSIONS

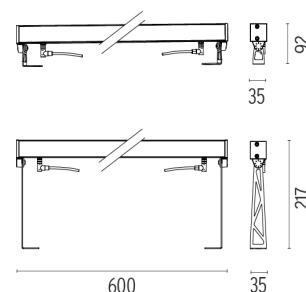

CERTIFICATIONS

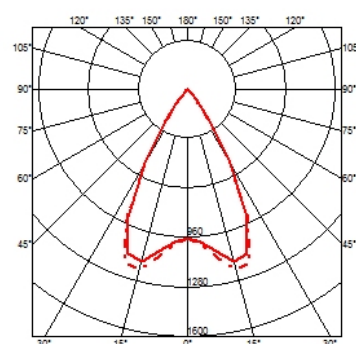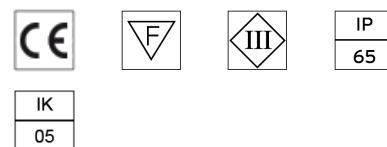

Outgraze 35 L 600 mm .Accessories

Structural



- F1204001
- F1204006
- F1204033
- F1204030
- F1204018



One pair of long rods L 200 mm.

- F1203001
- F1203006
- F1203033
- F1203030
- F1203018

One pair of short rods L 80 mm.

Outgraze 35 L 600 mm .Accessories

Power Supply



RF25746

Power supply 240W

Power supply 48V 240W / 110-240V single output DIN RAIL.

RF25753

Power supply 60W

Power supply 48V 60W / 110-240V IP67 Class I selv eq.



Outgraze 35 L 600 mm

designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

- F4256001 White
- F4256006 Grey
- F4256033 Anthracite
- F4256030 Black
- F4256018 Deep Brown

Electrical



F1206000

3/4 way terminal block 3 poles IP68


7-12 mm cables

F990C00A000



2 way terminal block 3 poles IP68

7-12 mm cables

DIMENSIONS

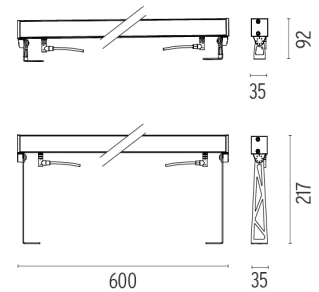

CERTIFICATIONS

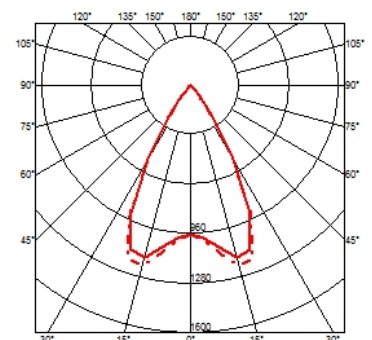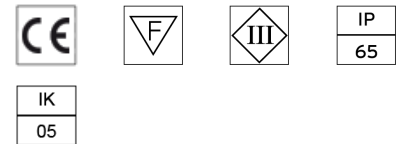

Outgraze 35 L 600 mm . Lamps



Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED


Outgraze 35 L 600 mm

designed by FLOS Outdoor



Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

- F4256001 White
- F4256006 Grey
- F4256033 Anthracite
- F4256030 Black
- F4256018 Deep Brown

DIMENSIONS

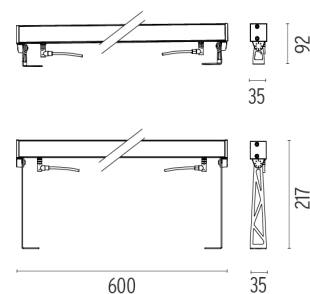

CERTIFICATIONS

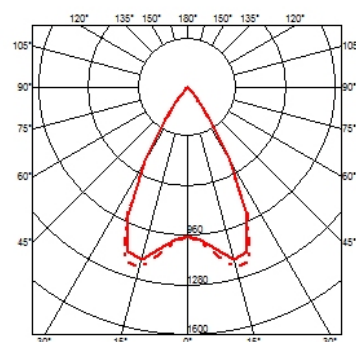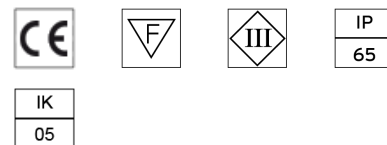

OUTGRAZE 35 L 600 MM

| | |
|--------------------------|--|
| Insulation class | Class III |
| Beam angle | 31° |
| Mounting | Ceiling surface, Wall surface |
| Lamps description | Power Led: 15W - 1300 lm ≠ *FIXT 965 lm - 3000K/CRI 80 - 48V (*FIXT lm = Medium Optic) |
| Environment | Indoor, Outdoor |
| Notes | We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire. |

Technical description

Central body in extruded aluminum, end cap in die-cast aluminum. Optics made with constant pitch between the lenses to offer a homogeneous luminous flux even in case of multiple lamps installed in a continuous line. High resistance external coating applied with a double layer of epoxy powders in accordance with the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. Diffuser in extra clear transparent glass, screen-printed and glued to ensure a watertight seal. The installation of the product requires use of steel brackets, to be ordered separately. Luminaire provided with a length of approximately 1500 mm of outgoing neoprene cable on one side. On request it is possible to provide luminaires with loop-through connection for multiple installation with continuity of line.



Outgraze 35 L 600 mm designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

| | |
|------------|------------|
| ● F4250001 | White |
| ● F4250006 | Grey |
| ● F4250033 | Anthracite |
| ● F4250030 | Black |
| ● F4250018 | Deep Brown |


ELECTRICAL

| | |
|---------------------------------|---------------|
| Transformer type | Electronic |
| Transformer availability | Separate item |
| Transformer mounting | Remote |
| Emergency | Without |
| Voltage (V) | 48 |



PHYSICAL

| | |
|------------------------|-------|
| IK rating | 05 |
| Aiming | Fixed |
| Weight (kg) | 1,65 |
| Number of heads | 1 |

DIMENSIONS

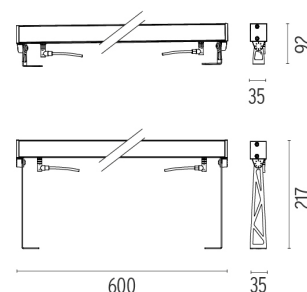

CERTIFICATIONS

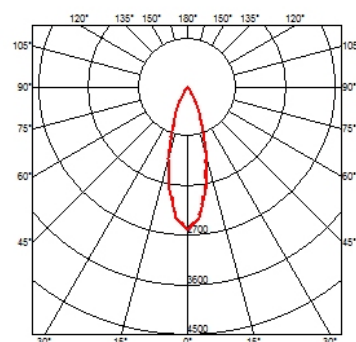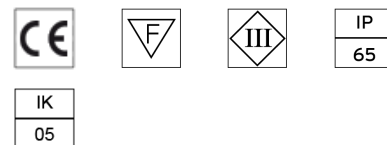



Outgraze 35 L 600 mm designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

- F4250001 White
- F4250006 Grey
- F4250033 Anthracite
- F4250030 Black
- F4250018 Deep Brown

Outgraze 35 L 600 mm .Accessories

Structural




- F1204001
- F1204006
- F1204033
- F1204030
- F1204018

One pair of long rods L 200 mm.



- F1203001
- F1203006
- F1203033
- F1203030
- F1203018

One pair of short rods L 80 mm.

DIMENSIONS

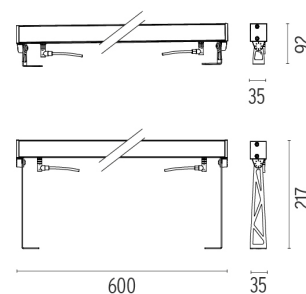


CERTIFICATIONS

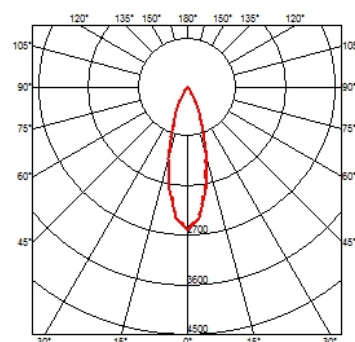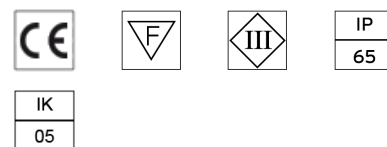

Outgraze 35 L 600 mm .Accessories


Power Supply



RF25746

Power supply 240W

Power supply 48V 240W / 110-240V single output DIN RAIL.



RF25753

Power supply 60W

Power supply 48V 60W / 110-240V IP67 Class I selv eq.




Outgraze 35 L 600 mm

designed by FLOS Outdoor



Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

- F4250001 White
- F4250006 Grey
- F4250033 Anthracite
- F4250030 Black
- F4250018 Deep Brown

DIMENSIONS

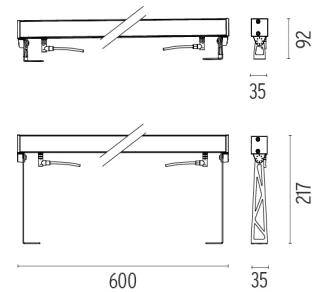

CERTIFICATIONS

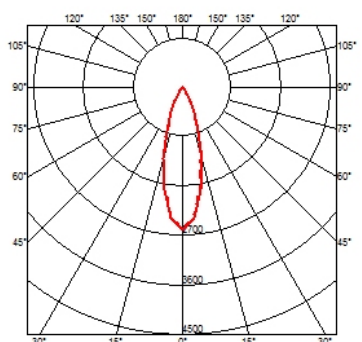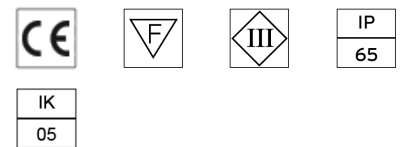

Electrical



F1206000

3/4 way terminal block 3 poles IP68

7-12 mm cables



F990C00A000

2 way terminal block 3 poles IP68

7-12 mm cables

Outgraze 35 L 600 mm . Lamps



Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED




Outgraze 35 L 600 mm

designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

- F4250001 White
- F4250006 Grey
- F4250033 Anthracite
- F4250030 Black
- F4250018 Deep Brown

DIMENSIONS

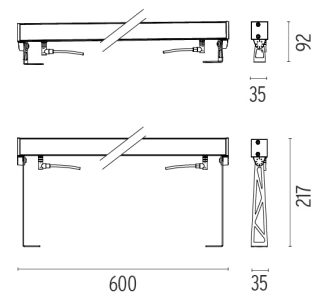

CERTIFICATIONS

