


## A-ROUND 240

<b>Insulation class</b>	Class II
<b>Beam angle</b>	10°
<b>Mounting</b>	Ground
<b>Lamps description</b>	Power Led: 21W - 2040 lm - 3000K/CRI 80 - 220-240V
<b>Environment</b>	Outdoor
<b>Notes</b>	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.





<b>Technical description</b>	External body made of stainless steel AISI 316L treated with the PVD process (Physical Vapour Deposition). Thanks to this innovative treatment, after the polishing or brushing process, according to the finishing choice, the surfaces of A-Round are coated with a thin film of metals such as zirconium and titanium which, combining with the steel at the molecular level, increase the resistance to both mechanical and to atmospheric agents, permitting the execution of elegant and durable finishings. The body of the luminaire is made of die-cast aluminum EN AB-47100 with low copper content, coated with two layers of paint with high resistance to corrosion. High-strength tempered clear glass, screen-printed to reduce glare. Driver for remote installation included, provided with M12 quick connector for watertight coupling. Installation requires a housing for flush mounting, to be ordered separately. It is necessary to provide an adequate level of gravel (> 300 mm) or a drain system to ensure drainage and avoid water stagnation. To ensure the sealing of the cable gland it is necessary to use flexible electric cables suitable for use in outdoor environments.
------------------------------	---




### A-Round 240

designed by Piero Lissoni

Ground-recessed luminaire for outdoor use, walkable and trafficable, available in three sizes, with adjustable optics in various configurations. Integrated 220/240V power source. Remote housing required, to be ordered separately. Dimmable version on request.

	F4582015	Polished Copper
	F4582046	Brushed Bronze
	F4582044	Brushed Gold
	F4582056	Shoot peened steel

### DIMENSIONS

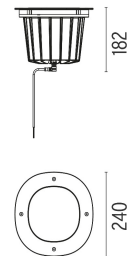

### ELECTRICAL

<b>Transformer type</b>	Electronic
<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Integral
<b>Emergency</b>	Without
<b>Voltage (V)</b>	220/240

### PHYSICAL

<b>IK rating</b>	10
<b>Aiming</b>	Adjustable
<b>Diameter (mm)</b>	240
<b>Number of heads</b>	1

### CERTIFICATIONS










## A-Round 240

designed by Piero Lissoni

Ground-recessed luminaire for outdoor use, walkable and trafficable, available in three sizes, with adjustable optics in various configurations. Integrated 220/240V power source. Remote housing required, to be ordered separately. Dimmable version on request.

-  F4582015 Polished Copper
-  F4582046 Brushed Bronze
-  F4582044 Brushed Gold
-  F4582056 Shoot peened steel

## DIMENSIONS

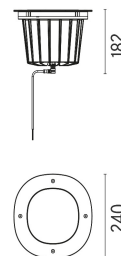

## CERTIFICATIONS



## A-Round 240 .Accessories

### Optical



 F4556000

**Honeycomb. 4 units Kit**

 F4559000

**Flood lens. 4 units Kit**


## A-Round 240 .Accessories

### Mounting



○ F4598000

### Remote Housing




### A-Round 240

designed by Piero Lissoni

Ground-recessed luminaire for outdoor use, walkable and trafficable, available in three sizes, with adjustable optics in various configurations. Integrated 220/240V power source. Remote housing required, to be ordered separately. Dimmable version on request.

- F4582015 Polished Copper
- F4582046 Brushed Bronze
- F4582044 Brushed Gold
- F4582056 Shoot peened steel

### DIMENSIONS

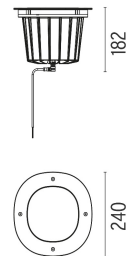

### CERTIFICATIONS



### Electrical



○ F1206000

**3/4 way terminal block 3 poles IP68**  
7-12 mm cables



○ F990C00A000

**2 way terminal block 3 poles IP68**  
7-12 mm cables

## A-Round 240 . Lamps



### Power LED

### Lamp category:

LED

### Socket:

Special base

### Lamp type:

Power LED




### A-Round 240

designed by Piero Lissoni


Ground-recessed luminaire for outdoor use, walkable and trafficable, available in three sizes, with adjustable optics in various configurations. Integrated 220/240V power source. Remote housing required, to be ordered separately. Dimmable version on request.

- F4582015 Polished Copper
- F4582046 Brushed Bronze
- F4582044 Brushed Gold
- F4582056 Shoot peened steel

### DIMENSIONS

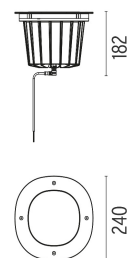

### CERTIFICATIONS

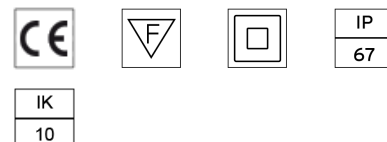

## A-ROUND 240

<b>Insulation class</b>	Class II
<b>Beam angle</b>	50°
<b>Mounting</b>	Ground
<b>Lamps description</b>	Power Led: 21W - 2040 lm - 3000K/CRI 80 - 220-240V
<b>Environment</b>	Outdoor
<b>Notes</b>	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.





<b>Technical description</b>	External body made of stainless steel AISI 316L treated with the PVD process (Physical Vapour Deposition). Thanks to this innovative treatment, after the polishing or brushing process, according to the finishing choice, the surfaces of A-Round are coated with a thin film of metals such as zirconium and titanium which, combining with the steel at the molecular level, increase the resistance to both mechanical and to atmospheric agents, permitting the execution of elegant and durable finishings. The body of the luminaire is made of die-cast aluminum EN AB-47100 with low copper content, coated with two layers of paint with high resistance to corrosion. High-strength tempered clear glass, screen-printed to reduce glare. Driver for remote installation included, provided with M12 quick connector for watertight coupling. Installation requires a housing for flush mounting, to be ordered separately. It is necessary to provide an adequate level of gravel (> 300 mm) or a drain system to ensure drainage and avoid water stagnation. To ensure the sealing of the cable gland it is necessary to use flexible electric cables suitable for use in outdoor environments.
------------------------------	---




### A-Round 240

designed by Piero Lissoni

Ground-recessed luminaire for outdoor use, walkable and trafficable, available in three sizes, with adjustable optics in various configurations. Integrated 220/240V power source. Remote housing required, to be ordered separately. Dimmable version on request.

	F4584015	Polished Copper
	F4584046	Brushed Bronze
	F4584044	Brushed Gold
	F4584056	Shoot peened steel

### DIMENSIONS




### ELECTRICAL

<b>Transformer type</b>	Electronic
<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Integral
<b>Emergency</b>	Without
<b>Voltage (V)</b>	220/240

### PHYSICAL

<b>IK rating</b>	10
<b>Aiming</b>	Adjustable
<b>Diameter (mm)</b>	240
<b>Number of heads</b>	1

### CERTIFICATIONS










## A-Round 240

designed by Piero Lissoni

Ground-recessed luminaire for outdoor use, walkable and trafficable, available in three sizes, with adjustable optics in various configurations. Integrated 220/240V power source. Remote housing required, to be ordered separately. Dimmable version on request.

-  F4584015 Polished Copper
-  F4584046 Brushed Bronze
-  F4584044 Brushed Gold
-  F4584056 Shoot peened steel

## DIMENSIONS



## CERTIFICATIONS



## A-Round 240 .Accessories

### Optical



 F4556000

**Honeycomb. 4 units Kit**

 F4559000

**Flood lens. 4 units Kit**

## A-Round 240 .Accessories

### Mounting



○ F4598000

### Remote Housing




### A-Round 240

designed by Piero Lissoni

Ground-recessed luminaire for outdoor use, walkable and trafficable, available in three sizes, with adjustable optics in various configurations. Integrated 220/240V power source. Remote housing required, to be ordered separately. Dimmable version on request.

- F4584015 Polished Copper
- F4584046 Brushed Bronze
- F4584044 Brushed Gold
- F4584056 Shoot peened steel

### DIMENSIONS



### Electrical



○ F1206000

**3/4 way terminal block 3 poles IP68**

7-12 mm cables



○ F990C00A000

**2 way terminal block 3 poles IP68**

7-12 mm cables

### CERTIFICATIONS



## A-Round 240 . Lamps



### Power LED

### Lamp category:

LED

### Socket:

Special base

### Lamp type:

Power LED




### A-Round 240

designed by Piero Lissoni

Ground-recessed luminaire for outdoor use, walkable and trafficable, available in three sizes, with adjustable optics in various configurations. Integrated 220/240V power source. Remote housing required, to be ordered separately. Dimmable version on request.

- F4584015 Polished Copper
- F4584046 Brushed Bronze
- F4584044 Brushed Gold
- F4584056 Shoot peened steel

### DIMENSIONS



### CERTIFICATIONS





## A-ROUND 240

<b>Insulation class</b>	Class II
<b>Beam angle</b>	25°
<b>Mounting</b>	Ground
<b>Lamps description</b>	Power Led: 21W - 2040 lm - 3000K/CRI 80 - 220-240V
<b>Environment</b>	Outdoor
<b>Notes</b>	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.



<b>Technical description</b>	External body made of stainless steel AISI 316L treated with the PVD process (Physical Vapour Deposition). Thanks to this innovative treatment, after the polishing or brushing process, according to the finishing choice, the surfaces of A-Round are coated with a thin film of metals such as zirconium and titanium which, combining with the steel at the molecular level, increase the resistance to both mechanical and to atmospheric agents, permitting the execution of elegant and durable finishings. The body of the luminaire is made of die-cast aluminum EN AB-47100 with low copper content, coated with two layers of paint with high resistance to corrosion. High-strength tempered clear glass, screen-printed to reduce glare. Driver for remote installation included, provided with M12 quick connector for watertight coupling. Installation requires a housing for flush mounting, to be ordered separately. It is necessary to provide an adequate level of gravel (> 300 mm) or a drain system to ensure drainage and avoid water stagnation. To ensure the sealing of the cable gland it is necessary to use flexible electric cables suitable for use in outdoor environments.
------------------------------	---




### A-Round 240

designed by Piero Lissoni

Ground-recessed luminaire for outdoor use, walkable and trafficable, available in three sizes, with adjustable optics in various configurations. Integrated 220/240V power source. Remote housing required, to be ordered separately. Dimmable version on request.

	F4583015	Polished Copper
	F4583046	Brushed Bronze
	F4583044	Brushed Gold
	F4583056	Shoot peened steel

### DIMENSIONS




### ELECTRICAL

<b>Transformer type</b>	Electronic
<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Integral
<b>Emergency</b>	Without
<b>Voltage (V)</b>	220/240

### PHYSICAL

<b>IK rating</b>	10
<b>Aiming</b>	Adjustable
<b>Diameter (mm)</b>	240
<b>Number of heads</b>	1

### CERTIFICATIONS

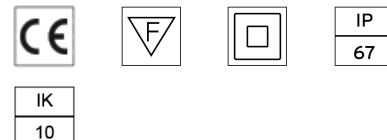








## A-Round 240

designed by Piero Lissoni

Ground-recessed luminaire for outdoor use, walkable and trafficable, available in three sizes, with adjustable optics in various configurations. Integrated 220/240V power source. Remote housing required, to be ordered separately. Dimmable version on request.

-  F4583015 Polished Copper
-  F4583046 Brushed Bronze
-  F4583044 Brushed Gold
-  F4583056 Shoot peened steel

## DIMENSIONS

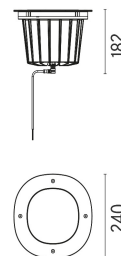

## CERTIFICATIONS



## A-Round 240 .Accessories

### Optical



 F4556000

**Honeycomb. 4 units Kit**

 F4559000

**Flood lens. 4 units Kit**

## A-Round 240 .Accessories

### Mounting



F4598000

### Remote Housing




### A-Round 240

designed by Piero Lissoni

Ground-recessed luminaire for outdoor use, walkable and trafficable, available in three sizes, with adjustable optics in various configurations. Integrated 220/240V power source. Remote housing required, to be ordered separately. Dimmable version on request.

- F4583015 Polished Copper
- F4583046 Brushed Bronze
- F4583044 Brushed Gold
- F4583056 Shoot peened steel

### DIMENSIONS

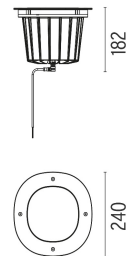

### CERTIFICATIONS



### Electrical



F1206000

**3/4 way terminal block 3 poles IP68**  
7-12 mm cables



F990C00A000

**2 way terminal block 3 poles IP68**  
7-12 mm cables

## A-Round 240 . Lamps



### Power LED

### Lamp category:

LED

### Socket:

Special base

### Lamp type:

Power LED



### A-Round 240

designed by Piero Lissoni

Ground-recessed luminaire for outdoor use, walkable and trafficable, available in three sizes, with adjustable optics in various configurations. Integrated 220/240V power source. Remote housing required, to be ordered separately. Dimmable version on request.

- F4583015 Polished Copper
- F4583046 Brushed Bronze
- F4583044 Brushed Gold
- F4583056 Shoot peened steel

### DIMENSIONS



### CERTIFICATIONS

