

# FLOS

## KAP SURFACE CEILING Ø100

<b>Number of heads</b>	1
<b>Mounting</b>	Ceiling surface
<b>Lamps description</b>	Power LED 9W 850 lm 3000K CRI 80
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Voltage (V)</b>	110/240
<b>Environment</b>	Indoor



### OPTICAL

<b>Reflector finish</b>	White
<b>Aiming</b>	Fixed
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	33°

### Kap Surface Ceiling Ø100 designed by FLOS Architectural

Luminaire for mounting in ceiling with LED light source. non-regulable 110/240V, 50-60hz power supply integrated in luminaire body.



### ELECTRICAL

<b>Number of ballast</b>	1
<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Integral
<b>Transformer type</b>	Electronic
<b>Emergency</b>	Without
<b>Insulation class</b>	Class I


	03.4520.11A - 378lm	White / White
	03.4520.ASA - 378lm	Brushed Aluminium / White
	03.4520.ANA - 378lm	Black / White
	03.4520.B3A - 378lm	Brown / White

### PHYSICAL

<b>Diameter (mm)</b>	100
<b>Height (mm)</b>	235
<b>Construction material</b>	Extruded aluminum
<b>Weight (kg)</b>	0,85

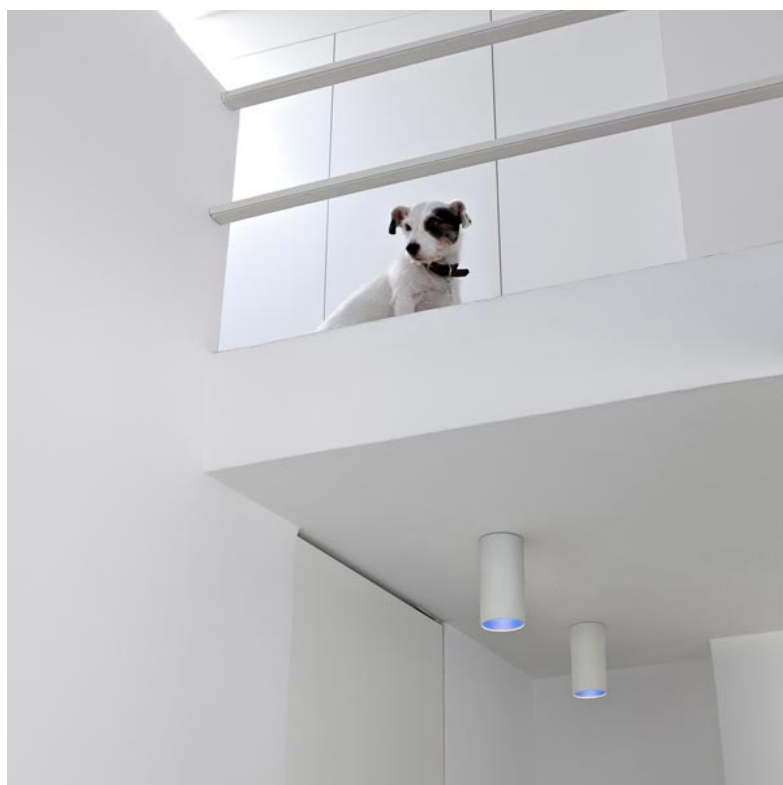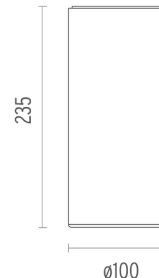

### CERTIFICATIONS

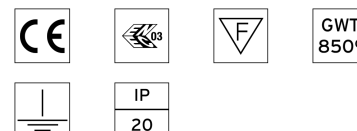

# FLOS

## Kap Surface Ceiling Ø100 . Lamps



### Power LED

**Lamp category:**  
LED




**Socket:**  
Special base


**Lamp type:**  
Power LED



### Kap Surface Ceiling Ø100 designed by FLOS Architectural

Luminaire for mounting in ceiling with LED light source. non-regulable  
110/240V, 50-60hz power supply  
integrated in luminaire body.

	03.4520.11A - 378lm	White / White
	03.4520.ASA - 378lm	Brushed Aluminium / White
	03.4520.ANA - 378lm	Black / White
	03.4520.B3A - 378lm	Brown / White

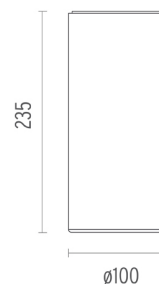

### CERTIFICATIONS

