

FLOS

LIGHT SHADOW FIXED TRIM DALI VERSION 12 SPOTS OPTIC FLOOD

Mounting	Ceiling recessed
Lamps description	Power LED 32,4W 3360 lm 3000K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	Pre-installation frame not required.

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	33° Flood

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic dimmable DALI
Emergency	Without
Insulation class	Class II

PHYSICAL



Length (mm)	427
Recessed depth (mm)	75
Weight (kg)	0,66





Light Shadow Fixed Trim Dali Version 12 Spots Optic Flood
designed by FLOS Architectural

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included.

- 03.9175.40.DA - 2523lm White / White
- 03.9175.14.DA - 2523lm Black / White
- 03.9177.40.DA - 2580lm White / Chrome
- 03.9177.14.DA - 2580lm Black / Chrome
- 03.9178.40.DA - 2500lm White / Matt Gold
- 03.9178.14.DA - 2500lm Black / Matt Gold
- 03.9176.40.DA - 2451lm White / Black
- 03.9176.14.DA - 2451lm Black / Black

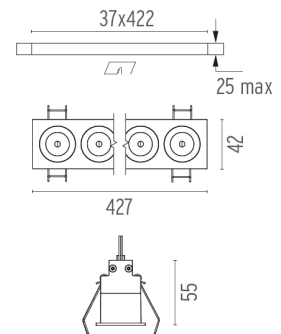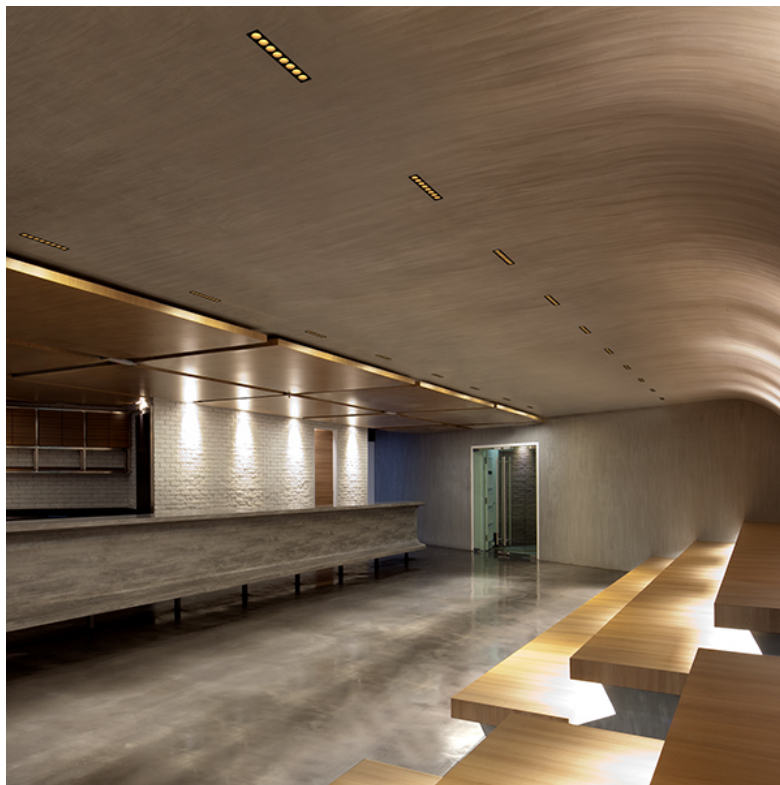

CERTIFICATIONS

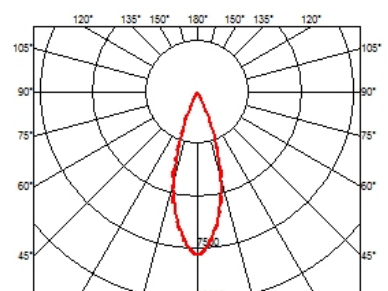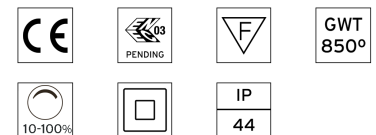

FLOS

Light Shadow Fixed Trim Dali Version 12 Spots Optic Flood . Lamps



Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED




Light Shadow Fixed Trim Dali Version 12 Spots Optic Flood



designed by FLOS Architectural

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included.

- 03.9175.40.DA - 2523lm White / White
- 03.9175.14.DA - 2523lm Black / White
- 03.9177.40.DA - 2580lm White / Chrome
- 03.9177.14.DA - 2580lm Black / Chrome
- 03.9178.40.DA - 2500lm White / Matt Gold
- 03.9178.14.DA - 2500lm Black / Matt Gold
- 03.9176.40.DA - 2451lm White / Black
- 03.9176.14.DA - 2451lm Black / Black

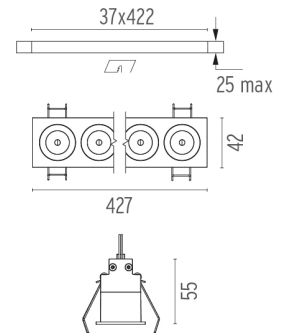

CERTIFICATIONS

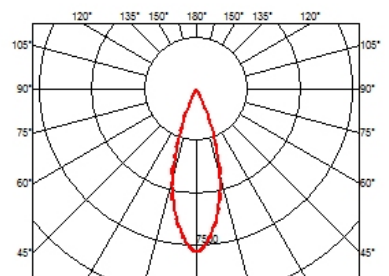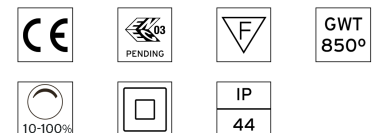

FLOS

LIGHT SHADOW ADJUSTABLE TRIM DALI VERSION 12 SPOTS OPTIC FLOOD

Mounting	Ceiling recessed
Lamps description	Power LED 32,4W 3360 lm 3000K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	Pre-installation frame not required.

OPTICAL

Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	33° Flood

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic dimmable DALI
Emergency	Without
Insulation class	Class II

PHYSICAL



Recessed depth (mm)	75
Weight (kg)	0,66





Light Shadow Adjustable Trim Dali Version 12 Spots Optic Flood
designed by FLOS Architectural

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included.

- 03.9375.40.DA - 2523lm White / White
- 03.9375.14.DA - 2523lm Black / White
- 03.9377.40.DA - 2580lm White / Chrome
- 03.9377.14.DA - 2580lm Black / Chrome
- 03.9378.40.DA - 2500lm White / Matt Gold
- 03.9378.14.DA - 2500lm Black / Matt Gold
- 03.9376.40.DA - 245lm White / Black
- 03.9376.14.DA - 245lm Black / Black

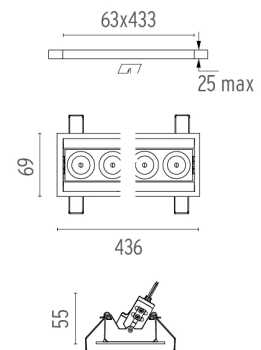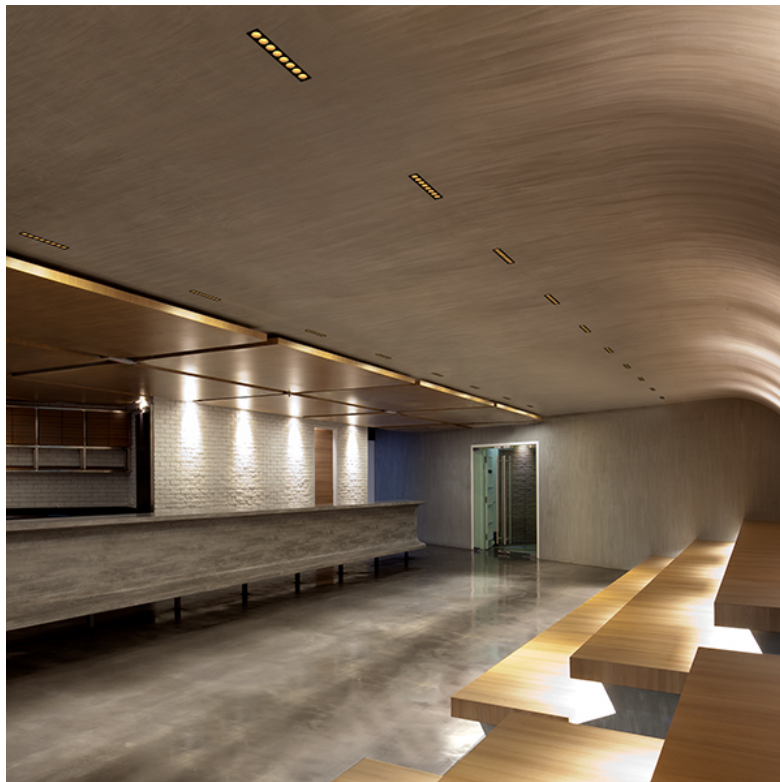

CERTIFICATIONS

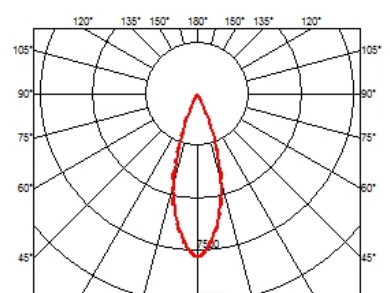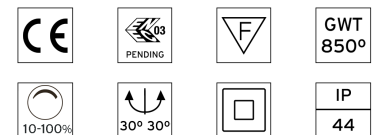

FLOS

Light Shadow Adjustable Trim Dali Version 12 Spots Optic Flood . Lamps



Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED




Light Shadow Adjustable Trim Dali Version 12 Spots Optic Flood





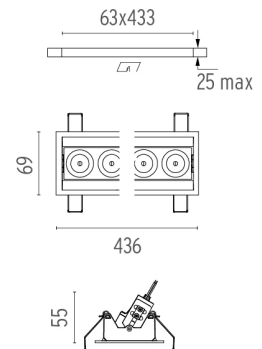

designed by FLOS Architectural

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included.

-  03.9375.40.DA - 2523lm White / White
-  03.9375.14.DA - 2523lm Black / White
-  03.9377.40.DA - 2580lm White / Chrome
-  03.9377.14.DA - 2580lm Black / Chrome
-  03.9378.40.DA - 2500lm White / Matt Gold
-  03.9378.14.DA - 2500lm Black / Matt Gold
-  03.9376.40.DA - 2451lm White / Black
-  03.9376.14.DA - 2451lm Black / Black



CERTIFICATIONS

			GWT 850°
			IP 44

