

HENGE®

Product Sheet

Model

BK SLIM CHANDELIER

Dimmable pendant led lamp (energy efficiency index A), energy saving with warm light, in several compositions made up of burnished finish brass rings or H-Silver®, pure 99.9% silver on brass, burnished by hand using traditional techniques, which is a result of an exclusive HENGE recipe. Available in different sizes. Transformers inserted in the ceiling rosette, rings powered with low voltage through suspension wires.

Scheda Prodotto

Modello


BK SLIM CHANDELIER

Lampada sospensione a led (classe energetica tipo A), dimmerabile, basso consumo con luce calda, in varie composizioni formata da anelli in ottone brunito e H-Silver®, argento (purissimo) 99,9% su ottone, brunito a mano utilizzando tecniche tradizionali, frutto di una ricetta esclusiva HENGE. Realizzata a mano in diverse misure. Trasformatori inseriti nel rosone, alimentazione degli anelli a bassa tensione realizzata tramite i cavi di sospensione.


BK SLIM CHANDELIER

Design Massimo Castagna

BK Slim Chandelier Small 2 ring . anelli



BK Slim Chandelier Medium 3 ring . anelli



DIMENSIONS

2 ring composition

1 x Ø 32 cm ring with led;
12W - 950Lm - 3000K
2 x Ø 21 cm ring with led;
8W - 636Lm - 3000K
Total 20W - 1586Lm


3 ring composition

1 x Ø 40 cm ring with led;
14,7W - 1168Lm - 3000K
2 x Ø 32 cm ring with led;
12W - 950Lm - 3000K
3 x Ø 21 cm ring with led;
8W - 636Lm - 3000K
Total 34,7W - 2754Lm

4 ring composition

1 x Ø 50 cm ring with led;
18,7W - 1482Lm - 3000K
2 x Ø 40 cm ring with led;
14,7W - 1168Lm - 3000K
3 x Ø 32 cm ring with led;
12W - 950Lm - 3000K
4 x Ø 21 cm ring with led;
8W - 636Lm - 3000K
Total 53,4W - 4236Lm

BK Slim Chandelier Maxi 4 ring . anelli

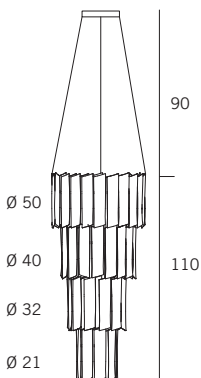

DIMENSIONI

Composizione a 2 anelli

1 anello da Ø 32 cm con led;
12W - 950Lm - 3000K
2 anello da Ø 21 cm con led;
8W - 636Lm - 3000K
Totale 20W - 1586Lm

Composizione a 3 anelli

1 anello da Ø 41 cm con led;
14,7W - 1168Lm - 3000K
2 anello da Ø 32 cm con led;
12W - 950Lm - 3000K
3 anello da Ø 21 cm con led;
8W - 636Lm - 3000K
Totale 34,7W - 2754Lm

Composizione a 4 anelli

1 anello da Ø 50 cm con led;
18,7W - 1482Lm - 3000K
2 anello da Ø 41 cm con led;
14,7W - 1168Lm - 3000K
3 anello da Ø 32 cm con led;
12W - 950Lm - 3000K
4 anello da Ø 21 cm con led;
8W - 636Lm - 3000K
Totale 53,4W - 4236Lm