
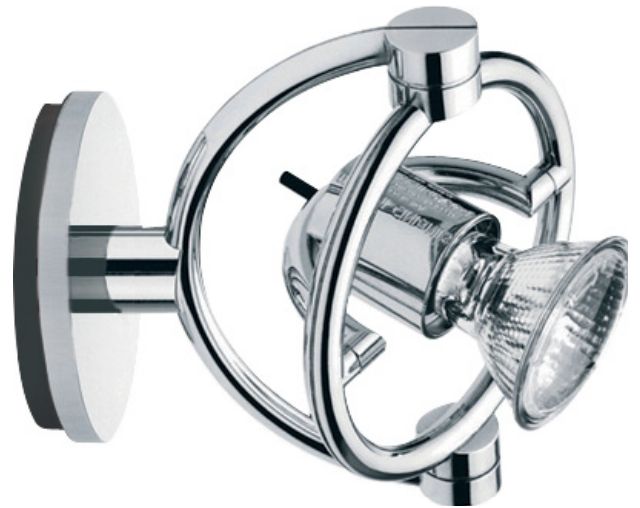


miniFariuno parete/soffitto

miniLuminaire for accent lighting operating 230V without any transformer, can be oriented independently in every direction. Four arm lengths for wall and ceiling version.



LUMINAIRE

materials	zama
environment	interiors
mounting location	wall/ceiling
emission	punctual direct light
weight	0,4 kg
tension	230V
insulation class	2
IP classification	IP20
marks	CE
design	Franco Bettonica, Mario Melocchi, 1998

LIGHT SOURCE

source	directional led PAR
socket	GU10
bulb included	yes
number of bulbs	1
power	5,5W (halo max 75W)
power	2.500 h
colour temperature	2.700K

FINISHES




chrome
cod 960L



silver
cod 961L

VERSIONS


miniFariuno parete/soffitto 25



chrome
cod 962L

silver
cod 963L


miniFariuno parete/soffitto 50



chrome
cod 964L

silver
cod 965L

miniFariuno parete/soffitto 100





chrome
cod 966L





silver
cod 967L

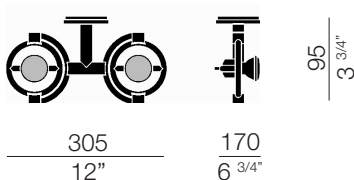miniFaridue parete/soffitto

miniLuminaire for accent lighting operating 230V without any transformer, comprising two modules that can be oriented in every direction.
Available as wall and ceiling version.



LUMINAIRE

materials	zama
environment	interiors
mounting location	wall/ceiling
emission	punctual direct light
weight	0,7 kg
tension	230V
insulation class	2
IP classification	IP20
marks	CE    
design	Franco Bettonica, Mario Melocchi, 1998

FINISHES




chrome
cod 968L




silver
cod 969L





LIGHT SOURCE


source	directional led PAR 
socket	GU10
bulb included	yes
number of bulbs	2
power	5,5W (halo max 75W)
power	2.500 h
colour temperature	2.700K

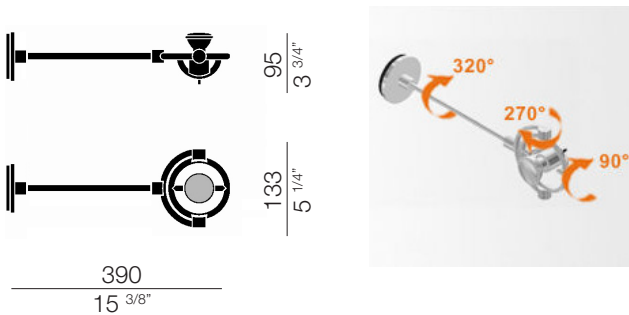

miniFariuno parete/soffitto 25




miniLuminaire for accent lighting operating 230V without any transformer, can be oriented independently in every direction. Four arm lengths for wall and ceiling version.



LUMINAIRE	
materials	zama
environment	interiors
mounting location	wall/ceiling
emission	punctual direct light
weight	0,5 kg
tension	230V
insulation class	2
IP classification	IP20
marks	CE    
design	Franco Bettonica, Mario Melocchi, 1998

LIGHT SOURCE	
source	directional led PAR 
socket	GU10
bulb included	yes
number of bulbs	1
power	5,5W (halo max 75W)
power	2.500 h
colour temperature	2.700K

FINISHES	
	chrome cod 962L
	silver cod 963L

VERSIONS	
miniFariuno parete/soffitto	chrome cod 960L silver cod 961L
 250 9 7/8"	
miniFariuno parete/soffitto 50	chrome cod 964L silver cod 965L
 640 25 1/4"	
miniFariuno parete/soffitto 100	chrome cod 966L silver cod 967L
 1140 44 7/8"	