

## Heco Wall

■ F014B20K030 - Black

Lighting unit with diffuse light for exterior ground/wall installation. Opalescent diffuser in shiny white translucent blown glass.

The structure is made of stainless steel for effective resistance to atmospheric agents. The body is painted an opaque black. The corner lamp can be positioned in two directions, either vertically or horizontally.

The light comes complete with external system to adjust the amount of light. LED light source included. 5-metre outdoor cable with Schuko IP44 plug. Backlit IP65 pedal dimmer switch on the cable for easy ON/OFF and to adjust the amount of light.


CASAMBI function on demand.

### Main specifications

|                       |       |                    |         |
|-----------------------|-------|--------------------|---------|
| <b>Lamp category</b>  | LED   | <b>Mountings</b>   | Wall    |
| <b>Power</b>          | 9     | <b>Environment</b> | Outdoor |
| <b>CCT</b>            | 2700K |                    |         |
| <b>CRI</b>            | 80    |                    |         |
| <b>Net lumen (lm)</b> | 394   |                    |         |



### Optical

|                           |                |
|---------------------------|----------------|
| <b>Lighting type</b>      | Direct         |
| <b>LED type</b>           | Power LED      |
| <b>Light distribution</b> | Symmetric      |
| <b>Optical type</b>       | Diffused light |

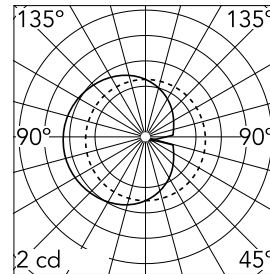

|             |       |      |
|-------------|-------|------|
| Beam Angle: | 0°    |      |
| h(m)        | E(lx) | D(m) |
| 1           | 2     |      |
| 2           | 4     |      |
| 3           | 8     |      |
| 4           | 33    |      |
| 5           | 0     |      |

Luminous flux luminaire  
394 lm

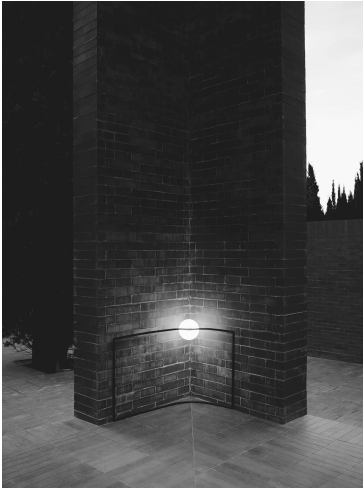

### Electrical

|                       |                 |                         |                 |
|-----------------------|-----------------|-------------------------|-----------------|
| <b>Frequency (Hz)</b> | 50-60           | <b>Driver type</b>      | Dimmer on board |
| <b>Voltage (V)</b>    | 100-240         | <b>Emergency</b>        | Without         |
| <b>Lamp holder</b>    | LED             | <b>Insulation class</b> | II              |
| <b>Dimmable</b>       | Yes             |                         |                 |
| <b>Driver</b>         | remote included |                         |                 |

### Physical

|                    |       |
|--------------------|-------|
| <b>Color</b>       | Black |
| <b>Orientation</b> | Fixed |
| <b>Weight (kg)</b> | 3.2   |

### Certification / Marking

